




BRGW7100/1000



DESCRIPTION:

External garden or walkway bollard luminaire,
 Body made of die-cast aluminium with polyester powder
 Coated finish.
 Epoxy cationic electro-coating, upon phospho-chromate
 Treatment, Uv-stabilising primer
 Diffuser made of tempered, thermal shock and impact
 Resistant glass.
 High corrosion resistant capability
 Silicon rubber gasket for dust & waterproof
 Stainless steel alloy screws.
 Power supply: 240V/50Hz
 -Heat resistant and solid conduct wiring
 -Ideal for external Garden and Area lighting
 -European standard of EN 60598

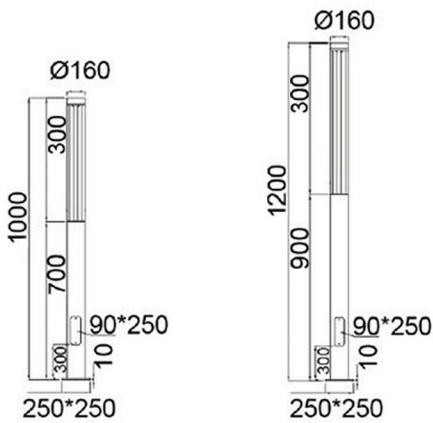


BRGW7100/1000

BRGW7100/1200




BROADWAY - UK Ltd.

Model	BRGW7100 / BRGW7200				
Power	10W LED	20W LED	24W LED	30W LED	40W LED
LED Type	COB	COB	COB	COB	COB
Input Voltage	AC220-240V	AC85-220V	AC85-220V	AC85-220V	AC85-220V
Frequency Range	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
CRI	≥80	≥80	≥80	≥80	≥80
Luminous Flux	110-120LM/W	110-120LM/W	110-120LM/W	110-120LM/W	110-120LM/W
Color Temp.	2700-6500K	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Temp. in Working	-40°C +65°C	-40°C +65°C	-40°C +65°C	-40°C +65°C	-40°C +65°C
Protection	IP66	IP66	IP66	IP66	IP66
Size	Dia: 160mm x H: 1000/1200/1500/2000/2500/3000/3500/4000/4500/5000/6000mm				
Life Span	50000Hrs				


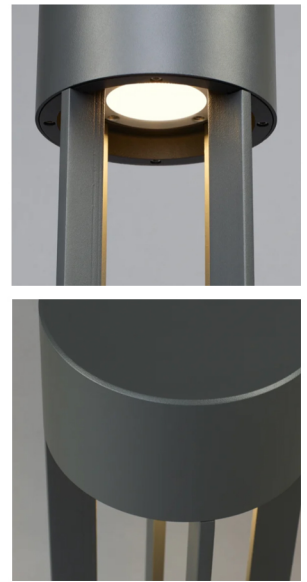


PHOTOMETRIC DATA


Light Distribution Curve 24°

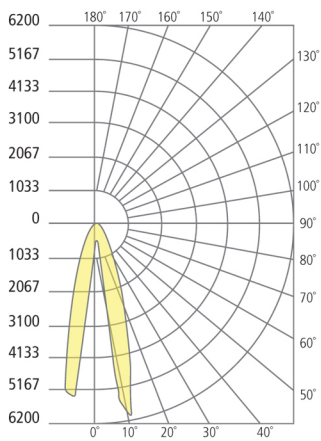

Light Distribution Curve 40°

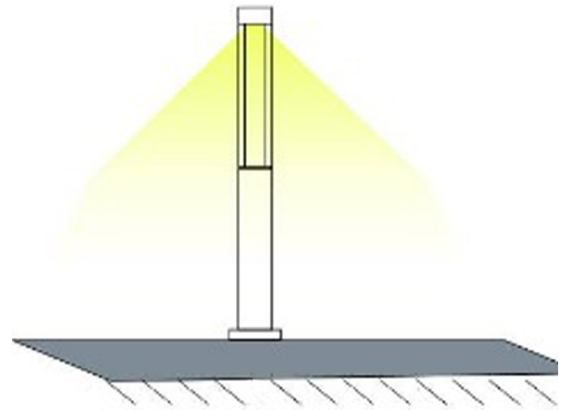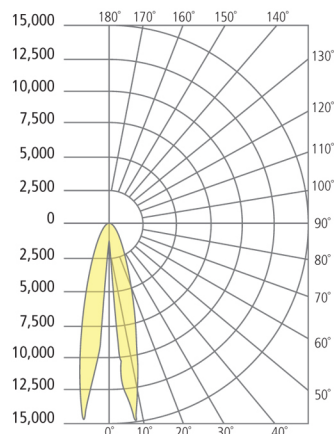

Dimension

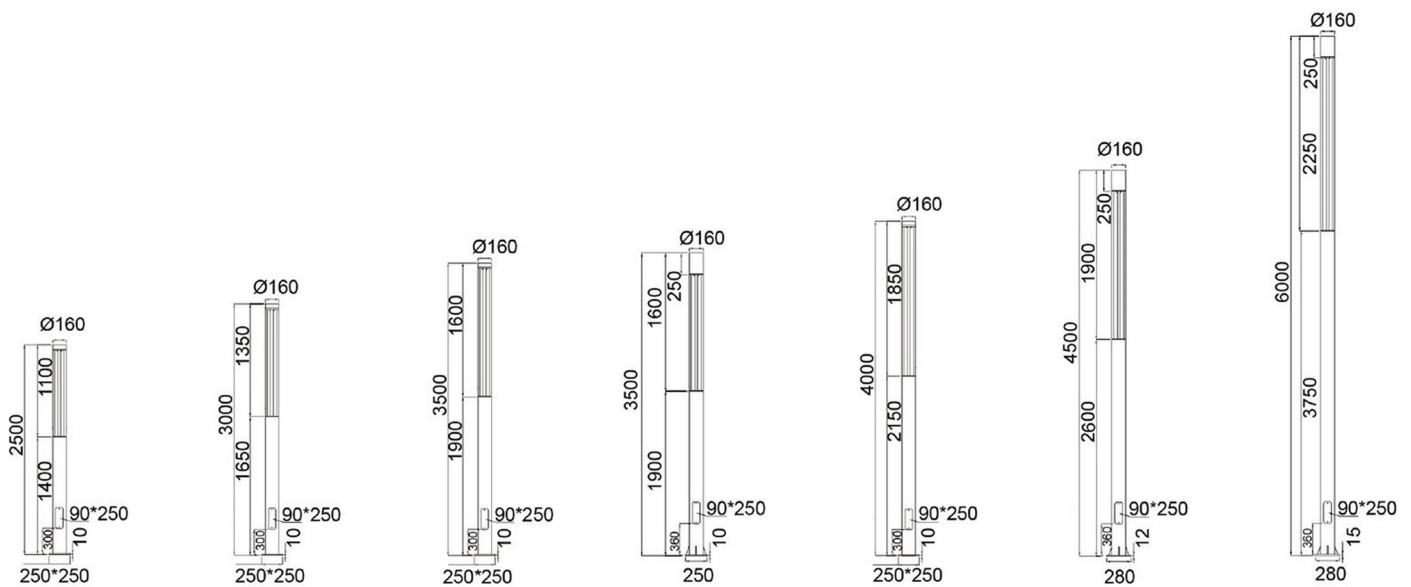

BRGW7100/2500

BRGW7100/3000

BRGW7100/3500

BRGW7200/3500

BRGW7100/4000

BRGW7200/4500

BRGW7200/6000