




DESCRIPTION:


- Surface wall / ceiling mounted Microwave Sensor bulkhead light,
- Body made of polycarbonate
- Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.
- Diffuser made of vandal resistant, V2 self exting-uishing, Uv-stabilised polycarbonate.
- Reflector made of anodized aluminium
- High corrosion resistant capability
- Silicon rubber gasket for dust proof
- Stainless steel alloy screws
- Power supply: 90V-265V/50-60Hz
- Heat resistant and solid conduct wiring
- Ideal for external lighting
- European standard of EN 60598




MSBH15

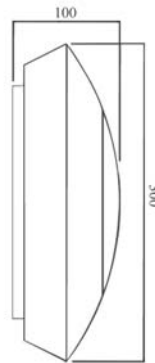

Photometric Data:

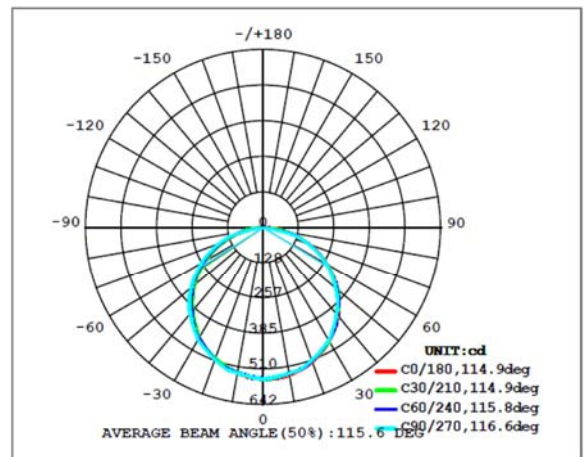

| Model No. | MHBH15-A | MHBH15-B | MHBH15-C | MHBH15-D |
|-------------------------|-------------------|-------------------|--------------------------------|--------------------------------|
| Power | 15W LED | 15W LED | 15W + 3W LED (Emergency Power) | 15W + 3W LED (Emergency Power) |
| LED Type | 75Pcs 2835 SMD | 75Pcs 2835 SMD | 75Pcs 2835 SMD | 75Pcs 2835 SMD |
| Dimension | Dia:300x300x100mm | Dia:300x300x100mm | Dia:300x300x100mm | Dia:300x300x100mm |
| Voltage | AC90V-265V | AC90V-265V | AC90V-265V | AC90V-265V |
| Power Factor | >0.95 | >0.95 | >0.95 | >0.95 |
| Color Temp. | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K |
| CRI | ≥82 | ≥82 | ≥82 | ≥82 |
| Luminous Flux | 1150-1300LM | 1150-1300LM | 1150-1300LM | 1150-1300LM |
| Temp. in Working | -30°C +50°C | -30°C +50°C | -30°C +50°C | -30°C +50°C |
| Protection | IP65 | IP65 | IP65 | IP65 |
| Microwave Sensor | NO | YES | NO | YES |
| Warranty | Three Years | | | |





Installation Details:

