




S-2095

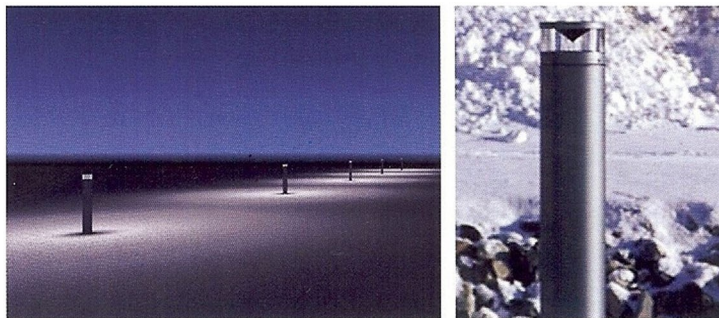

DESCRIPTION:

External garden or walkway bollard luminaire,
 Body made of die-cast / Extruded aluminium with polyester
 Powder Coated finish.
 (Marine grade version available on request)
 Epoxy cationic electro-coating, upon phospho-chromate
 Treatment, Uv-stabilising primer
 Diffuser made of vandal resistant, V2 self extinguishing,
 Uv-stabilized polycarbonate,
 Crystal shining indirect lighting aluminium / fiber panel
 High corrosion resistant capability
 Silicon rubber gasket for dust & water proof
 Stainless steel alloy screws.
 Power supply: 240V/50Hz
 -Heat resistant and solid conduct wiring
 -Ceramic lamp holder
 -Ideal for external Garden and Area lighting
 -European standard of EN 60598

| Model: | S-2095 | | | |
|------------------|-------------|-------------|-------------|-------------|
| Power | 5W COB LED | 10W COB LED | 15W COB LED | 20W COB LED |
| Input Voltage | 240V/50Hz | 240V/50Hz | 240V/50Hz | 240V/50Hz |
| CRI | ≥80 | ≥80 | ≥80 | ≥80 |
| Luminous Flux | 110LM/W | 110LM/W | 110LM/W | 110LM/W |
| Color Temp. | 2700-6500K | 2700-6500K | 2700-6500K | 2700-6500K |
| Power Factor | >0.95 | >0.95 | >0.95 | >0.95 |
| Temp. in Working | -20°C +50°C | -20°C +50°C | -20°C +50°C | -20°C +50°C |
| Life Span | 50000Hrs | | | |

Power : Max. 35W LED, E27 Version.

