


Strictly follow the installation instruction
 A gravel bed should be prepared at the time of installation.
 The electric gear is inside the luminaire.
 Installation at drive way not applicable




DESCRIPTION:

- Body and frame made of die-cast aluminium with polyester Powder coated finish.
- Anodized aluminium reflector.
- Tempered clear glass diffuser resistant to thermal shock
- PC Recessed mounting sleeve for easy installation
- High corrosion resistance capability.
- Silicon gasket for dust and water proof.
- Stainless steel alloy screw.
- High quality electrical components
- Power supply 240V/50Hz
- Heat resistant and solid conduct wiring
- Ideal for external garden, pathway lighting
- European standard of EN 60598



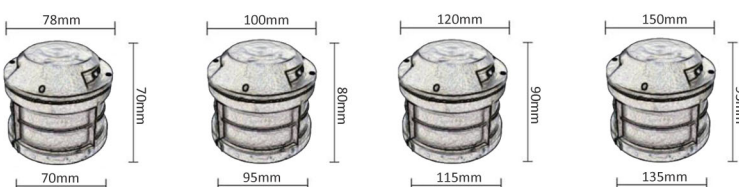


LED Available:

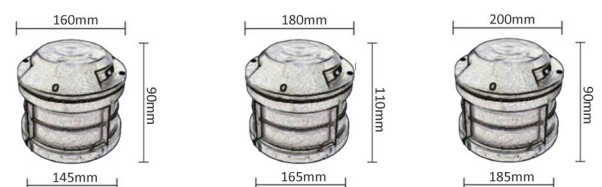

Product Code	DDL250-D1/D2/D3/D4							
Rated Power	3W LED	5W LED	6W LED	9W LED	12W LED	18W LED	20W LED	24W LED
LED Type	EPISTAR / CREE	EPISTAR / CREE	EPISTAR / CREE	EPISTAR / CREE	EPISTAR / CREE	EPISTAR / CREE	EPISTAR / CREE	EPISTAR / CREE
Product Size	78x78x70mm	120x120x90mm	150x150x95mm	160x160x90mm	180x180x110mm	200x200x90mm	250x250x125mm	250x250x125mm
	100x100x80mm	---	---	---	---	---	---	---
Input Voltage	DC12V/24V / AC220V 50Hz-60Hz							
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Efficiency	≥89%	≥89%	≥89%	≥89%	≥89%	≥89%	≥89%	≥89%
Color Temperature	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
Color Rendering Index	>80	>80	>80	>80	>80	>80	>80	>80
Mini Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temperature in Working	(-)20°C- (+)50°C	(-)20°C- (+)50°C	(-)20°C- (+)50°C	(-)20°C- (+)50°C	(-)20°C- (+)50°C	(-)20°C- (+)50°C	(-)20°C- (+)50°C	(-)20°C- (+)50°C
Humidity of working Condition	<85%	<85%	<85%	<85%	<85%	<85%	<85%	<85%
Finish	Black / Grey	Black / Grey	Black / Grey	Black / Grey	Black / Grey	Black / Grey	Black / Grey	Black / Grey
Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Life Span	40000 - 50000Hrs							

Photometric Data

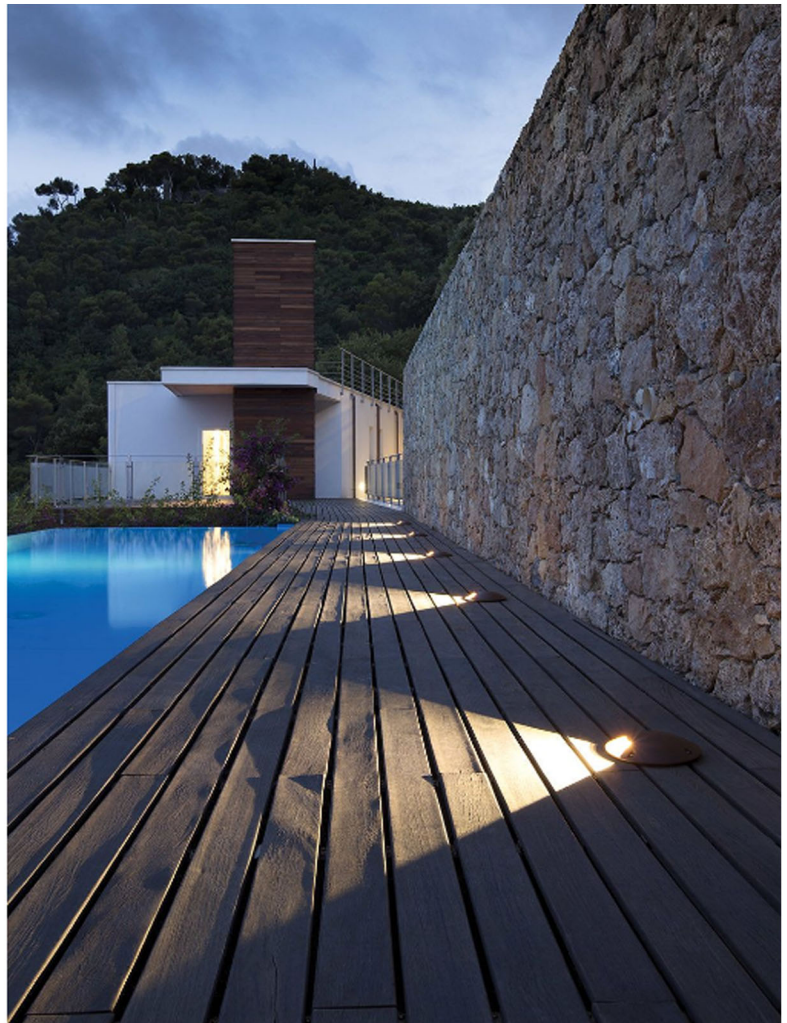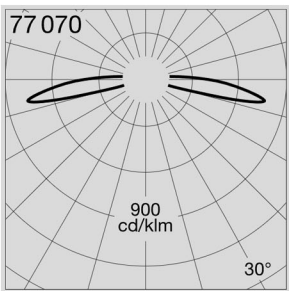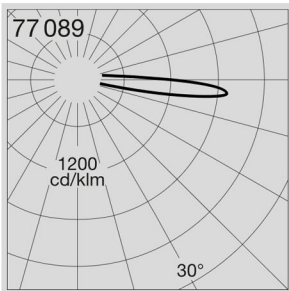

Installation

