




**DESCRIPTION:**

- Recessed mounted LED downlight for asymmetrical lighting
- Body made of die-cast aluminium, electro powder coated surface finish.
- Reflector made of anodized aluminium for glare free lighting distribution.
- Diffuser made of clear tempered glass
- Mounting clamp in galvanized plate for easy installation and maintenance.
- Aluminium heat sink for heat dissipation
- Heat resistant and solid conduct wiring
- Philips / Bridgelux LED
- Ideal for wall wash lighting
- European standard of EN 60598

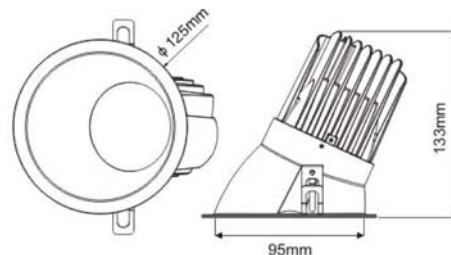

Order Code: "RD"


Order Code: "OV"




Available:



**Photometric Data: 15W LED**

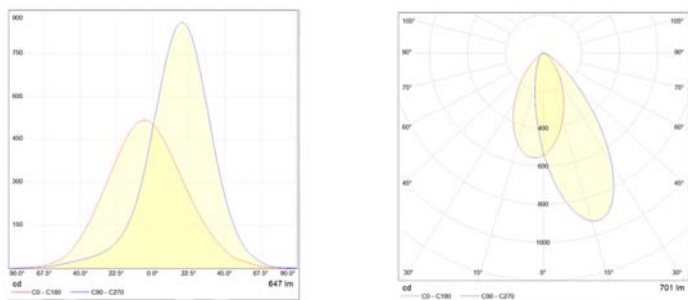

**Photometric Data: 10W LED**

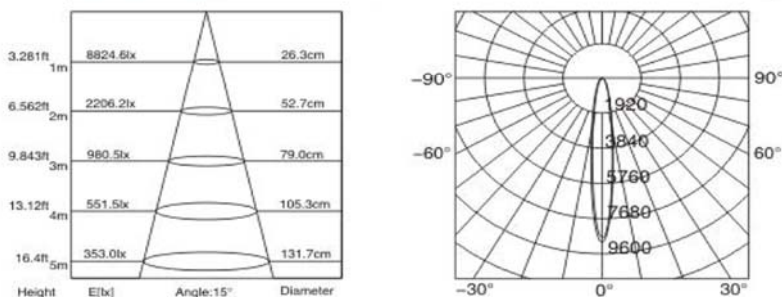

Model No.	BR1015-10	BR1015-15
Power	10W LED	15W LED
Voltage	AC220-240V	AC220-240V
Dimension	125x133mm	125x133mm
Power Factor	>0.90	>0.90
Luminous Flux	100LM/W	100LM/W
LED Chips	COB	COB
Color Temp.	2700 - 6500K	2700 - 6500K
Temp. in Working	-30°C +50°C	-30°C +50°C
Beam Angle	10°/ 23°/ 38°	10°/ 23°/ 38°
CRI	>80	>80
Life Span	50000Hrs	
Warranty	Three Year	