








PLUL200-D01






DESCRIPTION:

Recessed mounted directional pathway luminaire,
 Body & Frame made of solid stainless steel (316 Grade)
 Tempered clear / frosted glass diffuser
 High corrosion resistance capability.
 Stainless steel PG gland
 Passivated (Anodizing) Aluminum CNC machined
 mounting sleeve
 O-ring PMQ silicone gasket for dust and water proofing
 Stainless steel alloy screws
 Power supply: 220V-240V/50Hz, low voltage input
 constant current output for COB LED
 (High voltage item optional)
 - Heat resistant and solid conduct wiring
 - Ideal for External use
 - European standard of EN 60598



PLUL200-D02



PLUL200-D04

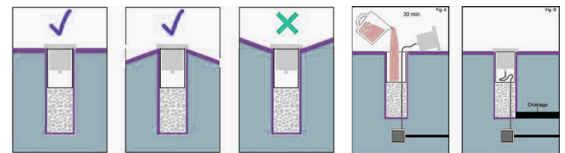


Product Code	PLUL200-D01	PLUL200-D02	PLUL200-D04
Rated Power	2W LED	4W LED	8W LED
LED Type	1PC 2W OSRAM 3030 SMD LED	2PC 2W OSRAM 3030 SMD LED	4PC 2W OSRAM 3030 SMD LED
System Lumen (OSRAM LED)	115-120LM/W	115-120LM/W	115-120LM/W
Luminaire Efficiency	40LM/W	40LM/W	40LM/W
Color Temperature	2700K - 6500K / RGB	2700K - 6500K / RGB	2700K - 6500K / RGB
CRI	>80+	>80+	>80+
Beam Angle	1x20° * 25°	2x20° * 25°	4x20° * 25°
Size (DC Version)	D116xH54mm	D116xH54mm	D116xH54mm
Size (AC Version)	D116xH85mm	D116xH85mm	D116xH85mm
Input Voltage	DC24V (Order Code: BV) Remote Drive required		
	AC85-265V (Order Code: BH)		
Cable	IPC Rubber cable 1M HO5PN-F 2 or 3X1mm square		
Driver	DC24V / DC12V (IP67)		
Temp. in Working	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C
Protection Grade	IP67 / IK10	IP67 / IK10	IP67 / IK10
Life Span	40000 - 50000Hrs		

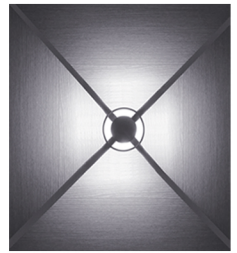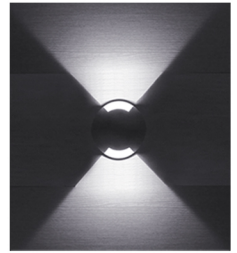


PHOTMETRIC DATA

PLUL200-D01

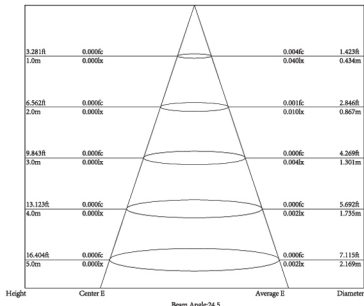


Lux distance Curve (1x20° * 25°)

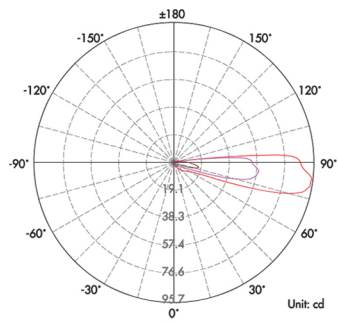


Lux distribution Curve (1x20° * 25°)

PLUL200-D02

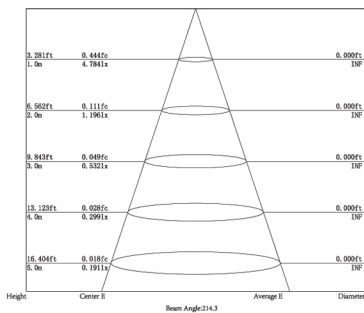


Lux distance Curve (2x20° * 25°)

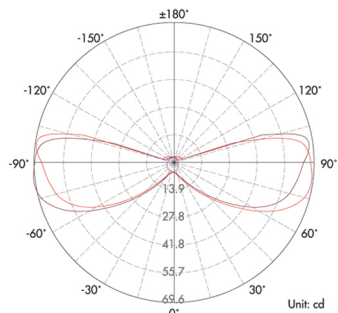


Lux distribution Curve (2x20° * 25°)


PLUL200-D04

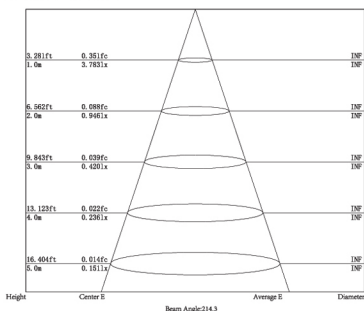

Lux distance Curve (4x20° * 25°)

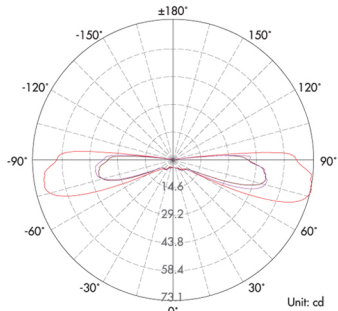

Lux distribution Curve (4x20° * 25°)

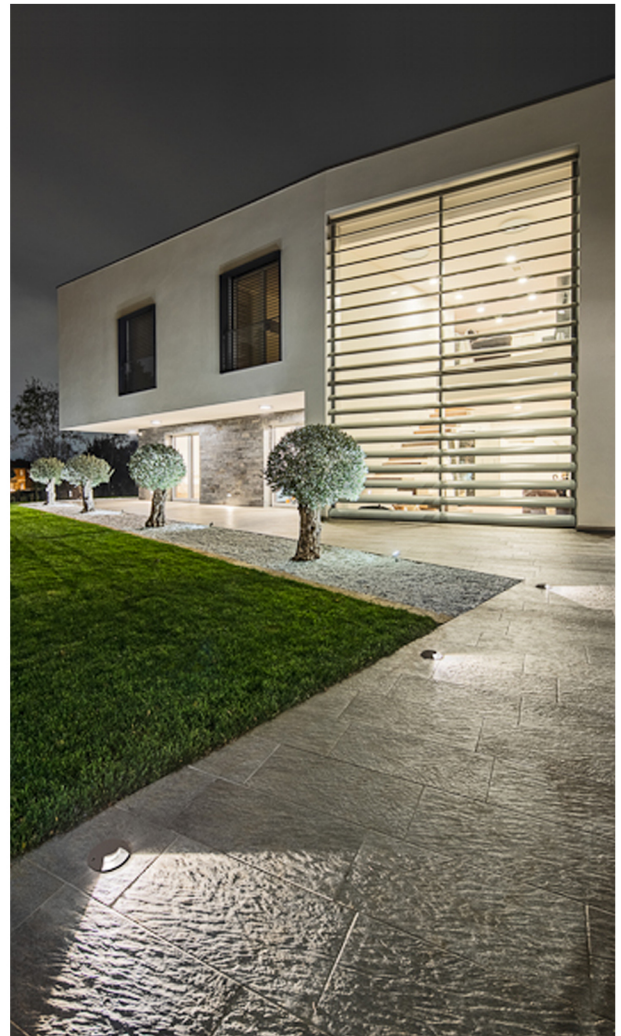

Available:

