

S-4015



CODE	LAMP	SOCKET	WATTAGE
S-4015-1	PAR38	E27	75 ~ 100W
S-4015-2	CDM-T/HCI-T	G12	35 ~ 150W
S-4015-3	MH/HQI	E27	70W
S-4015-4	ON/NAV	E27	50 ~ 70W
S-4015-5	LED	-	30W MAX.



**DESCRIPTION:**


External elevation or garden luminaire,  
 Body made of die-cast aluminium alloy with electro-coating static paint in matt finish.  
 Tempered clear glass diffuser.  
 Pure aluminium anodized reflector for better light distribution.  
 High corrosion resistance capability.  
 silicon gasket for dust and water proofing.  
 Stainless steel alloy screws.  
 Power supply 165V-265V/60Hz  
 - Heat resistant wiring  
 -Ideal for external Garden / elevation lighting  
 -European standard of EN 60598



S-4016A



S-4016B

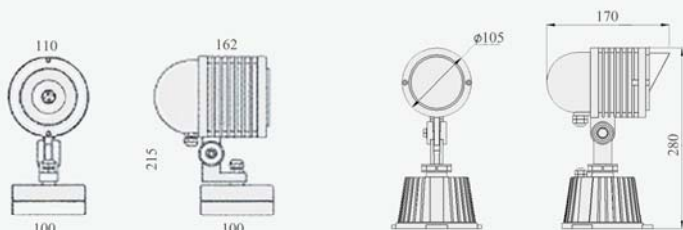

CODE	LAMP	SOCKET	WATTAGE
S-4016A/B-1	MR16 / GU10	-	35 ~ 50W
S-4016A/B-2	LED	-	30W MAX.



Available:



**TECHNICAL DATA:**



Product Code	S-4016A/B				
LED Type	COB	COB	COB	COB	COB
Rated Power	8W	10W	15W	20W	25W
Input Voltage	180V/260V	180V/260V	180V/260V	180V/260V	180V/260V
Frequency Range	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
THD	<20%	<20%	<20%	<20%	<20%
Color Temperature	2700K-6500K	2700K-6500K	2700K-6500K	2700K-6500K	2700K-6500K
Color Rendering Index	>80	>80	>80	>80	>80
Mini Luminous Flux	90LM/W	90LM/W	90LM/W	90LM/W	90LM/W
Temperature in Working Condition	(-) 20°C-50°C	(-) 20°C-50°C	(-) 20°C-50°C	(-) 20°C-50°C	(-) 20°C-50°C
Humidity of Working Condition	<85%	<85%	<85%	<85%	<85%
Life time	40000-50000Hrs	40000-50000Hrs	40000-50000Hrs	40000-50000Hrs	40000-50000Hrs
Protection Grade	IP67	IP67	IP67	IP67	IP67

Project 0 / Luminaire Parts list

- 1.) 2 x Broadway S-4016 12 COB LED

