



DESCRIPTION:

External garden or walkway Bollard luminaire,
Body made of die-cast aluminium with polyester powder coated finish.

Epoxy cationic electro-coating, upon phospho-chromate Treatment, Uv-stabilising primer.

Diffuser made of vandal resistant, V2 self exting-uishing, Uv-stabilised polycarbonate,

High corrosion resistant capability

silicon rubber gasket for dust & waterproof

Stainless steel alloy screws


Power supply: 240V/50Hz

-Heat resistant and solid conduct wiring

-Ideal for external Garden and Area lighting

-European standard of EN 60598

Model No:	S1468-1	S1468-2	S1468-1	S1468-2
Power	1x5W LED	2x5W LED	1x8W LED	2x8W LED
LED Type	COB	COB	COB	COB
Voltage	AC220V	AC220V	AC220V	AC220V
Luminous Flux	110-120LM	110-120LM	110-120LM	110-120LM
Color Temperature	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
CRI	>80	>70	>70	>70
Power Factor	<90%	<90%	<90%	<90%
Working Temp	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C
Protection	IP65	IP65	IP65	IP65
Life Span	50000Hrs			

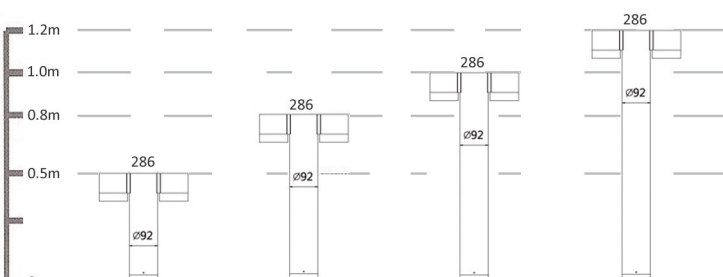

Customade size available on request



BROADWAY - UK Ltd.