





DESCRIPTION:

- Recessed mounted dust & moistureproof downlight
- Body made of die-cast aluminium in electro powder coated.
- Reflector made of anodized aluminium for glare free lighting distribution.
- Diffuser made of clear glass or semi frosted, Uv-stabilized and thermal shock resistant.
- Mounting clamp in galvanized plate for easy installation and maintenance.
- Die-cast aluminium heat sink
- Heat resistant and solid conduct wiring
- Philips / CREE LED
- Ideal for Hotel, Hospital, Office, Showroom etc.
- European standard of EN 60598



Photometric Data

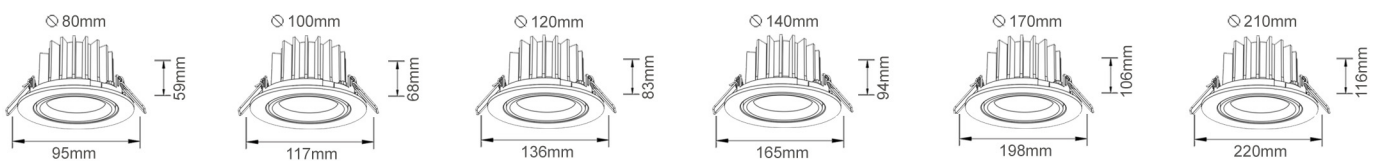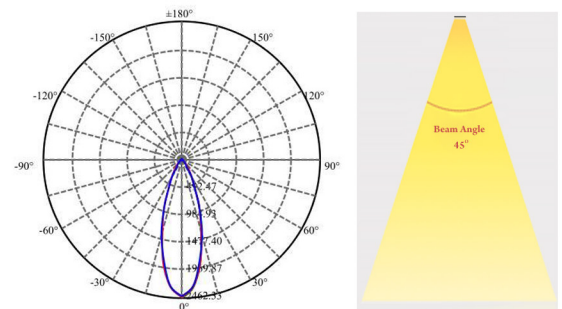

Model No.	TMB-80	TMB-100	TMB-120	TMB-140	TMB-170	TMB-210
Power	9W LED	15W LED	20W LED	25W LED	30W LED	40W LED
LED Type	CREE-PHILIPS	CREE-PHILIPS	CREE-PHILIPS	CREE-PHILIPS	CREE-PHILIPS	CREE-PHILIPS
Dimension	Dia:95xH:59mm	Dia:117xH:68mm	Dia:136xH:83mm	Dia:165xH:94mm	Dia:198xH:106mm	Dia:220xH:116mm
Voltage	AC165V-245V	AC165V-245V	AC165V-245V	AC165V-245V	AC165V-245V	AC165V-245V
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temp.	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	≥80	≥80	≥80	≥80	≥80	≥80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Temp. in Working	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C	-30°C +50°C
Beam Angle	45°	45°	45°	45°	45°	45°
Protection	IP54	IP54	IP54	IP54	IP54	IP54
Life Span	50000Hrs					