






BRDX-21



BRDX-22





BRDX-24




DESCRIPTION:

Recessed mounted floor wash pathway luminaire,
 Body and frame made of die-cast aluminium with polyester powder coated finish.
 Tempered clear / frosted glass diffuser resistant to thermal shock.
 PC recessed mounting sleeve for easy installation
 High corrosion resistance capability
 Silicon gasket for dust and water proof
 Stainless steel alloy screws
 Power supply: 220V-240V/50Hz
 - Heat resistant and solid conduct wiring
 - Ideal for external garden, pathway lighting
 - European standard of EN 60598


Available:

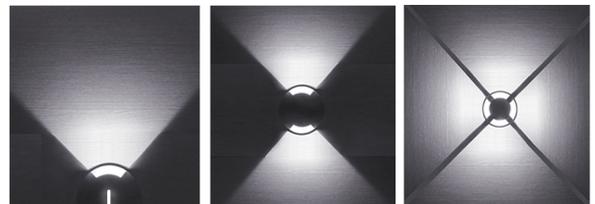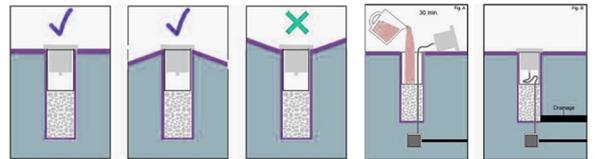


Product Code	BRDX-21	BRDX-22	BRDX-24
Rated Power	4W/6W/8W	4W/6W/8W/10W LED	4W/6W/8W/10W/12W LED
LED Type	SMD LED	SMD LED	SMD LED
Input Voltage	AC220-240V	AC220-240V	AC220-240V
Frequency Range	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz
Power Factor	>0.9	>0.9	>0.9
Color Temperature	3000K - 6500K	3000K - 6500K	3000K - 6500K
Color Rendering Index	>80	>80	>80
Efficiency	85% - 90%	85% - 90%	85% - 90%
Mini Luminous Flux	110-130LM/W	110-130LM/W	110-130LM/W
Temp. in Working condition	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C
Humidity of Working condition	<85%	<85%	<85%
Protection Grade	IP67	IP67	IP67
Size	120x120x85mm	120x120x85mm	120x120x85mm
Life Span		50000Hrs	

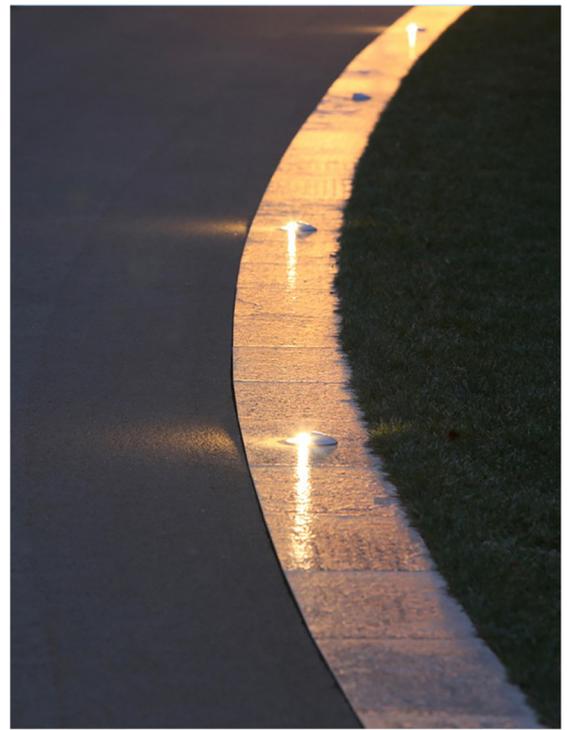


Photometric Data

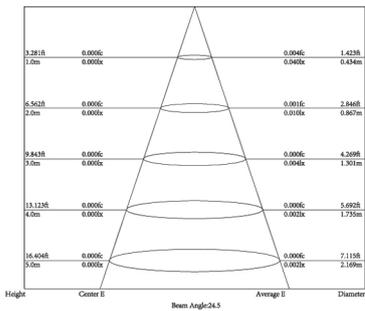


Lux distance Curve (1x20° *25°)




Lux distribution Curve

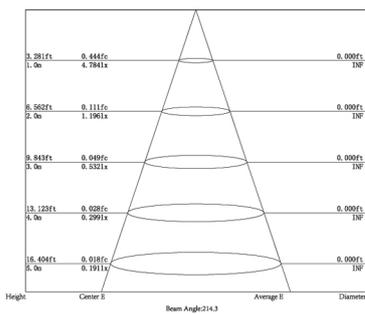


Lux distance Curve (2x20° *25°)



Lux distribution Curve

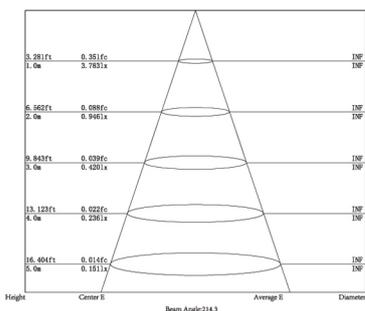

Lux distance Curve (4x20° *25°)



Lux distribution Curve

Installation

