



DESCRIPTION:

External garden or walkway Bollard luminaire,
ART : S8020, body made of extruded aluminium with Polyester powder coated finish.

ART : S9292, body made of die-cast aluminium with Polyester powder coated finish.

Epoxy cationic electro-coating, upon phospho-chromate Treatment, Uv-stabilising primer.

Diffuser made of vandal resistant, V2 self-extinguishing, Uv-stabilised polycarbonate,

High corrosion resistant capability

silicon rubber gasket for dust & waterproof

Stainless steel alloy screws


Power supply: 240V/50Hz

-Heat resistant and solid conduct wiring

-Ideal for external Garden and Area lighting

-European standard of EN 60598

Model No:	S8020-A/B	S8020-A/B	S8020-A/B	S9292-1	S9292-2
Power	8W LED -	12W LED -	15W LED -	1x5W LED 1x12W LED	2x5W LED 2x12W LED
LED Type	COB	COB	COB	COB	COB
Voltage	AC220V	AC220V	AC220V	AC220V	AC220V
Luminous Flux	110-120LM	110-120LM	110-120LM	110-120LM	110-120LM
Color Temperature	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
CRI	>80	>80	>80	>80	>80
Power Factor	<90%	<90%	<90%	<90%	<90%
Working Temp	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C
Protection	IP65	IP65	IP65	IP65	IP65
Life Span			50000Hrs		

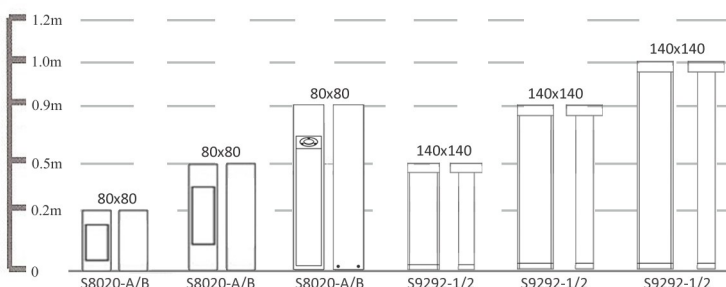

Custom made size and wattage available on request



One Side Version



Two Side Version

BROADWAY - UK Ltd.