




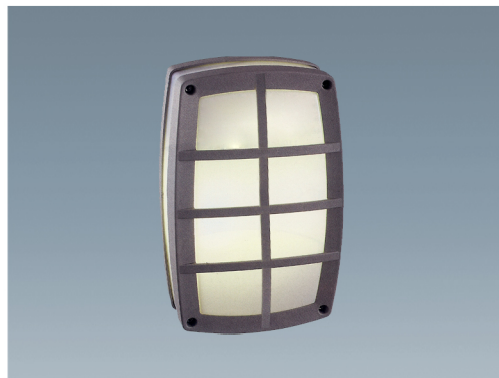


**WML022A**




**WML011A**



**WML011C**



**WML042B**



**DESCRIPTION:**

Surface wall mounted weatherproof bulkhead luminaire, Body made of die-cast aluminium with polyester powder coated finish.

Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.

Diffuser made of vandal resistant, V2 self exting-uishing, Uv-stabilised polycarbonate.

Reflector made of anodized aluminium

High corrosion resistant capability

Silicon rubber gasket for dust proof

Stainless steel alloy screws

Power supply: 240V/50Hz


-Heat resistant and solid conduct wiring

-Ideal for external lighting

-European standard of EN 60598

**LAMP OPTION**


SOCKET	WATTAGE	
E27	1x15W - 22W CFL	2x15W - 22W CFL
G23	1x9W - 11W TC-S	2x9W - 11W TC-S
G24	1x9W - 18W TC-D	2x9W - 18W TC-D
LED-E27	1X12W LED	2x12W LED
LED-G24D	1X11W LED	2x11W LED




Product Code	WML022A / WML011A / WML042B / WML011C				WML022A / WML011A / WML042B			
	10W LED	12W LED	15W LED	18W LED	20W LED	22W LED	24W LED	28W LED
Rated Power	10W LED	12W LED	15W LED	18W LED	20W LED	22W LED	24W LED	28W LED
LED Type	SMD	SMD	SMD	SMD	SMD	SMD	SMD	SMD
Input Voltage	220-240V/60HZ	220-240V/60HZ	220-240V/60HZ	220-240V/60HZ	220-240V/60HZ	220-240V/60HZ	220-240V/60HZ	220-240V/60HZ
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Color Temperature	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
Color Rendering Index	>80	>80	>80	>80	>80	>80	>80	>80
Efficiency	>89%	>89%	>89%	>89%	>89%	>89%	>89%	>89%
Mini Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W
Temp. in Working condition	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C	(-)20°C - (+)50°C
Protection	IP65, IK10	IP65, IK10	IP65, IK10	IP65, IK10	IP65, IK10	IP65, IK10	IP65, IK10	IP65, IK10
Life Span	50000Hrs				50000Hrs			

### Photometric Data


**10W LED**

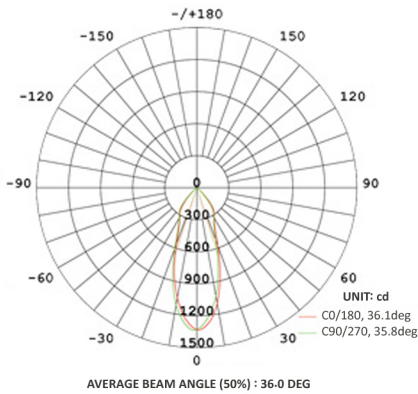


**12W LED**

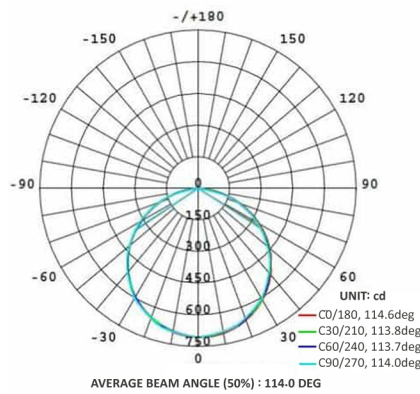


**15W LED**

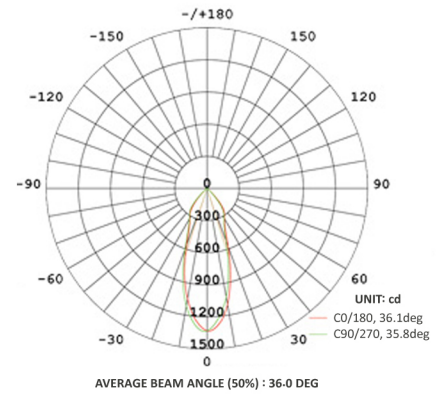


**18W LED**

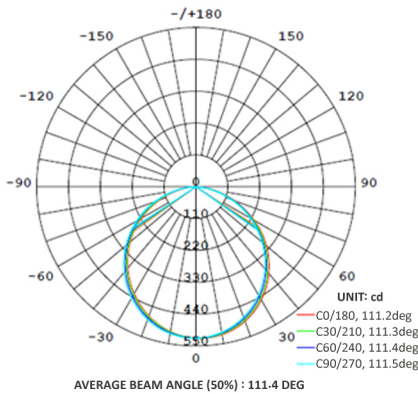


**20W LED**

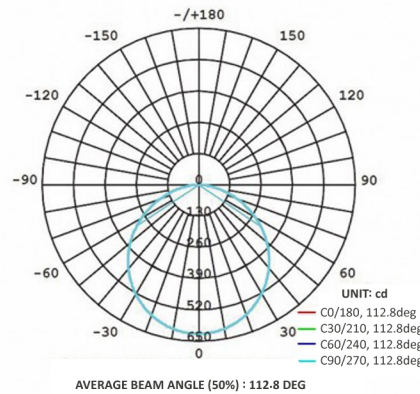

**22W LED**

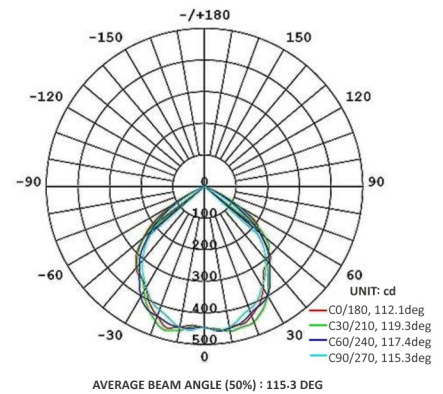

**24W LED**

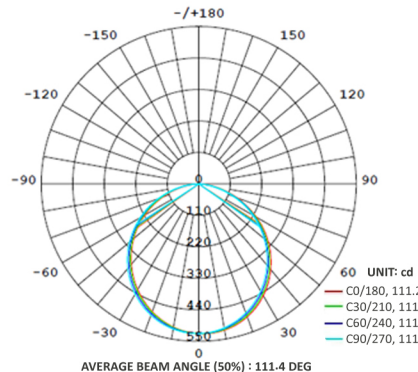

**28W LED**

