



**Color Selection**

- Black RAL 9011
- Dark Grey RAL 7043
- White RAL 9003
- Matt Silver RAL 9006
- Bronze RAL 6014

**Light Symbol**



**Top Projectors Option**



**Top view**



**DESCRIPTION:**

Modern and classical lighting Pole luminaire, Pole made of extruded aluminium in electro powder coated in matt finish. Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer. Diffuser made of vandal resistant, V2 self extinguishing, Uv-stabilised polycarbonate, acrylic High corrosion resistant capability silicon rubber gasket for dust proof & waterproof Stainless steel alloy screws Power supply: 240V/50Hz


- Heat resistant and solid conduct wiring
- Ideal for internal and external application
- European standard of EN 60598




Product Code:	BR-FX2010-A / BR-FX2010-B / BR-FX2010-C						
LED Type	PHILIPS						
Rated Power	20W	30W	40W	50W	60W	70W	80W
Input Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
THD	>15%	>15%	>15%	>15%	>15%	>15%	>15%
Color Temperature	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K
CRI	>80	>80	>80	>80	>80	>80	>80
Luminous Flux	120LM/W	120LM/W	120LM/W	120LM/W	120LM/W	120LM/W	120LM/W
Temp. in Working	(-) 25°C - (+) 50°C	(-) 25°C - (+) 50°C	(-) 25°C - (+) 50°C	(-) 25°C - (+) 50°C	(-) 25°C - (+) 50°C	(-) 25°C - (+) 50°C	(-) 25°C - (+) 50°C
Driver	Philips / Meanwell (Conventional electronic, DALI Dimmable)						
Life Time	50000Hrs						
Pole Size	W:150mm x D:150mm / W:200mm x D:200mm / W:240mm x D:240mm						

## PHOTOMETRIC DATA



BR-FX2010-A

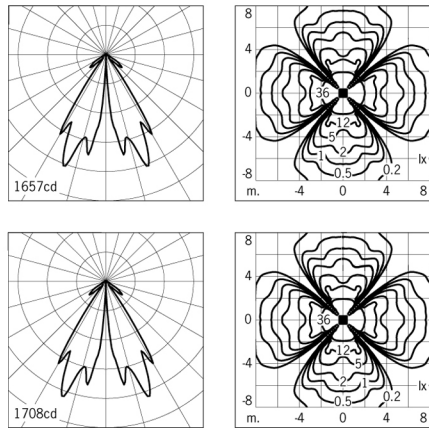

BR-FX2010-B

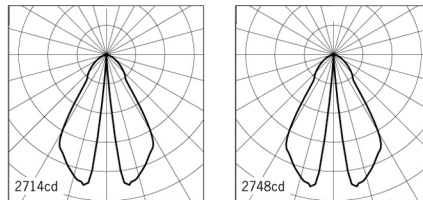

BR-FX2010-C

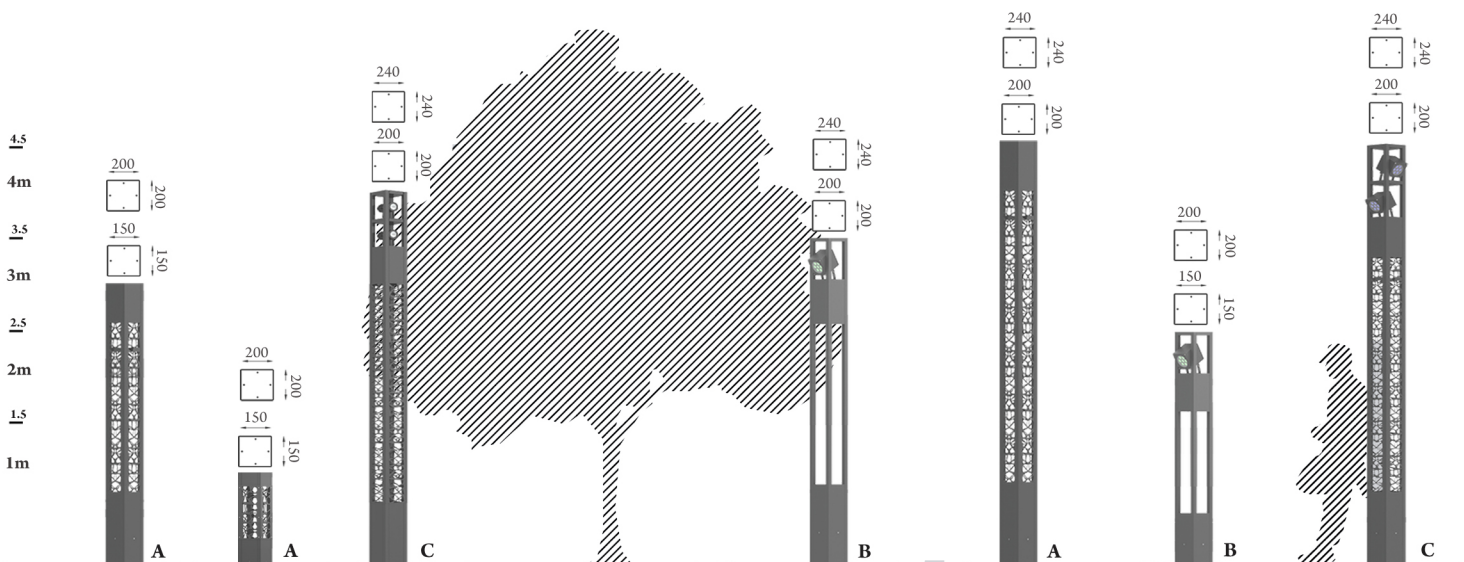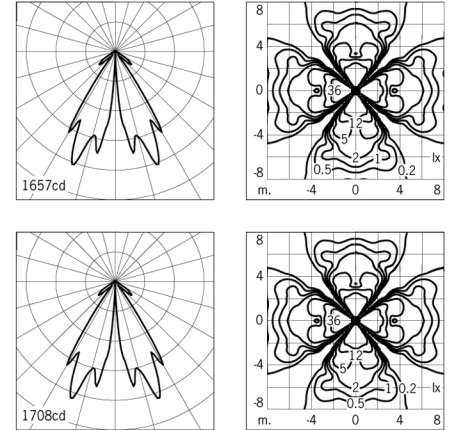

Custom made size available on request