

BR-LTS600B8




DESCRIPTION:

Modern decorative lighting Pole luminaire,
 Made of die-cast aluminium with polyester powder coated finish in black, silver, architectural bronze.
 Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.
 Tempered clear glass diffuser
 Anodized aluminium reflector, specular optics designed
 High corrosion resistant capability
 silicon rubber gasket for dust proof & waterproof
 High lumen LED chip Bridgelux and CREE
 Power supply: 220-240V / 12V / 24V - 50Hz
 - Heat resistant and solid conduct wiring
 - Ideal for external garden area lighting
 - European standard of EN 60598


POLE:

Column made of Hot Deep Galvanized steel with epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.
 Extruded aluminium pole available on request.




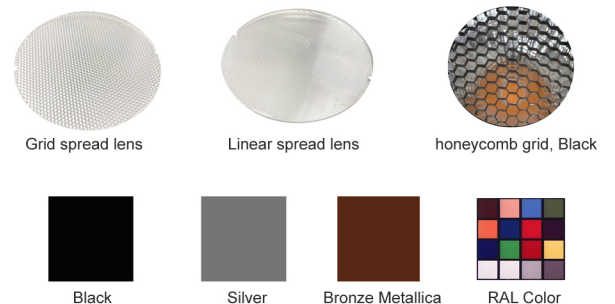


Item No:	BR-LTS600A/B	BR-LTS600A/B	BR-LTS600A/B	BR-LTS600A/B	BR-LTS600A/B	BR-LTS600A/B
LED Type	BRIDGELUX / CREE	BRIDGELUX / CREE	BRIDGELUX / CREE	BRIDGELUX / CREE	BRIDGELUX / CREE	BRIDGELUX / CREE
Rated Power	10W LED	15W LED	20W LED	30W LED	40W LED	60W LED
Luminaire Size	95x124x199mm	95x124x199mm	95x124x199mm	140x183x254mm	140x183x254mm	140x183x254mm
Voltage	AC220-240V / AC120-277V / DC12V / DC24V 50/60Hz					
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W
Color Temperature	2700K - 6000K	2700K - 6000K	2700K - 6000K	2700K - 6000K	2700K - 6000K	2700K - 6000K
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
CRI	>90	>90	>90	>90	>90	>90
Beam Angle	15 - 18 / 19 - 23 / 27 - 36 / 55 - 60 / 40 x 73°					
Driver	Philips / Meanwell	Philips / Meanwell	Philips / Meanwell	Philips / Meanwell	Philips / Meanwell	Philips / Meanwell
Protection	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08
Dimming	DALI & DSI Dimming 1-10V Dimming (On request)					
Life Time	50000Hrs					





POLE MOUNTING DETAILS

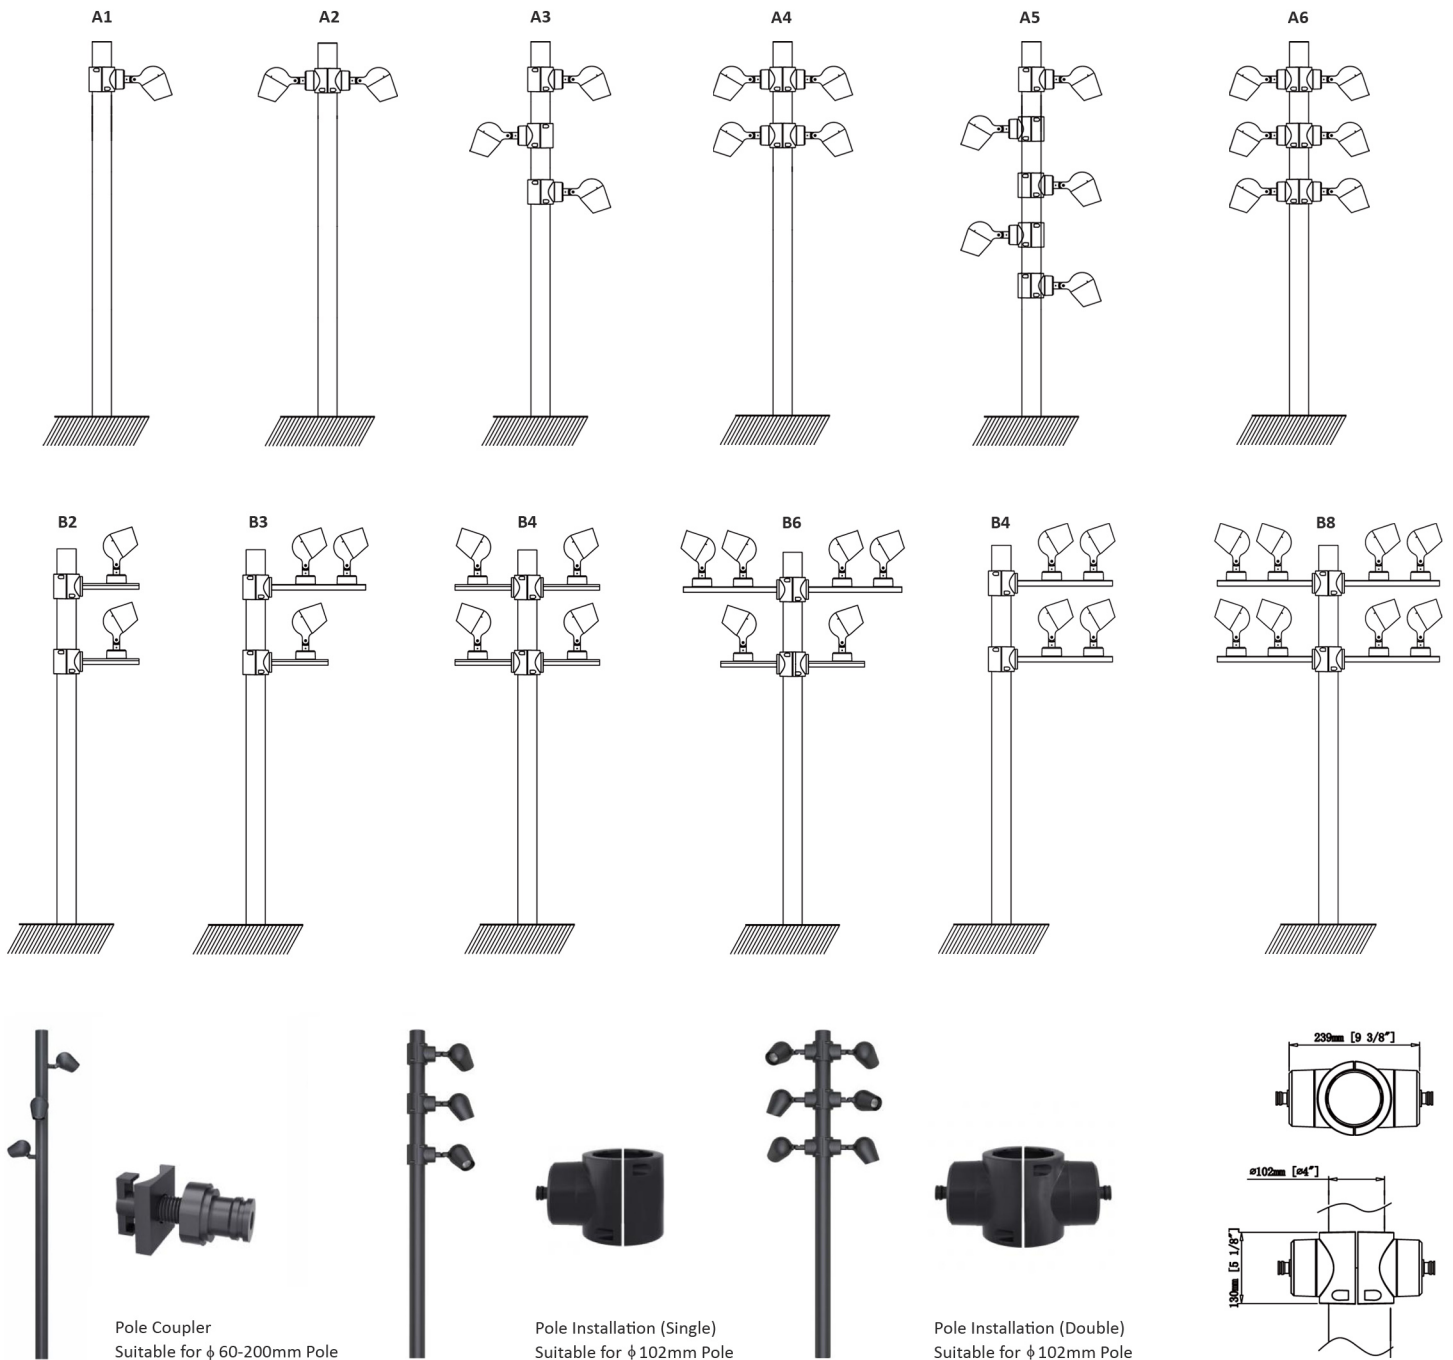





10W-3000K

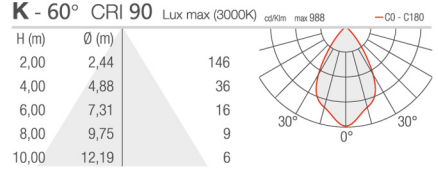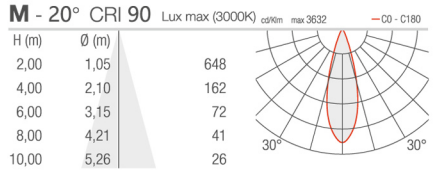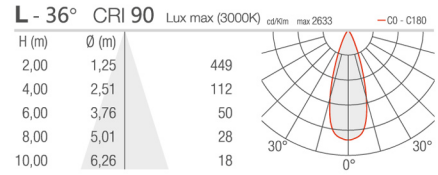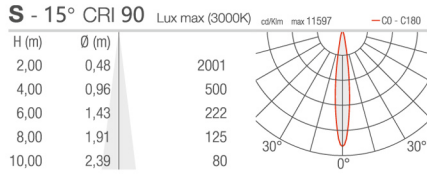




15W-3000K

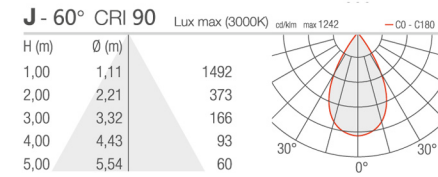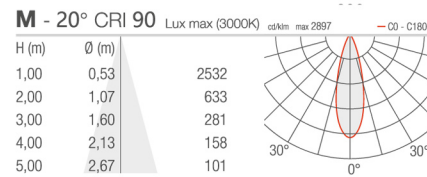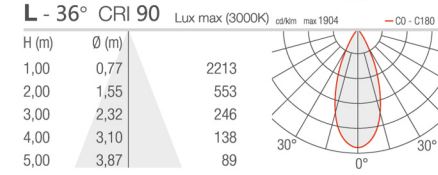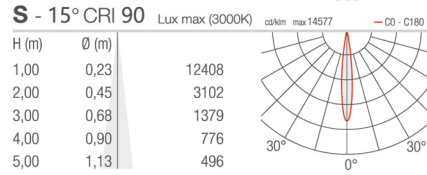




20W-3000K

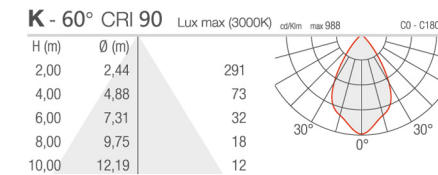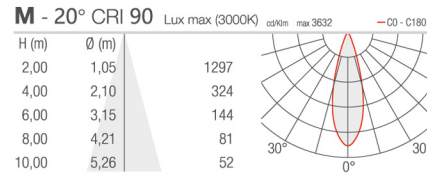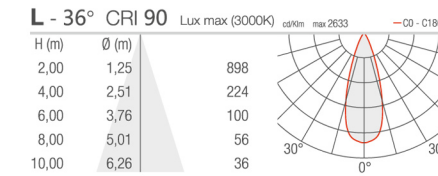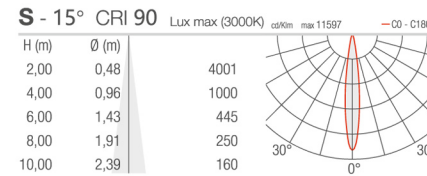


30W-3000K

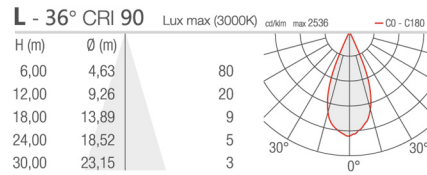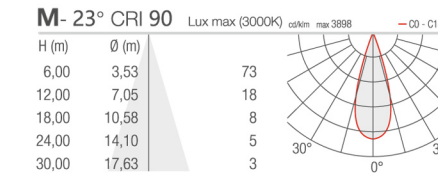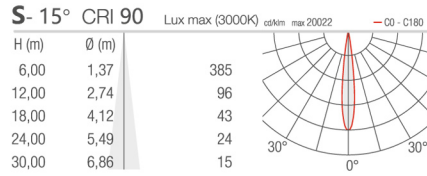

40W-3000K

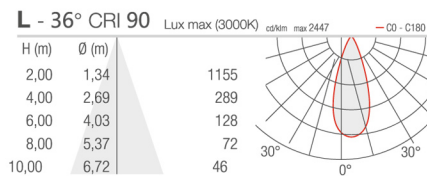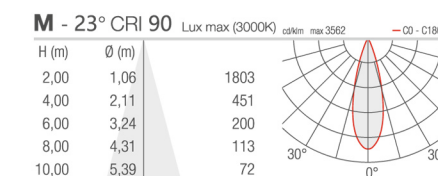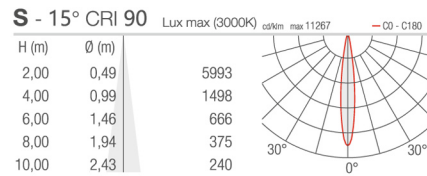

INSTALLATION DETAILS - A

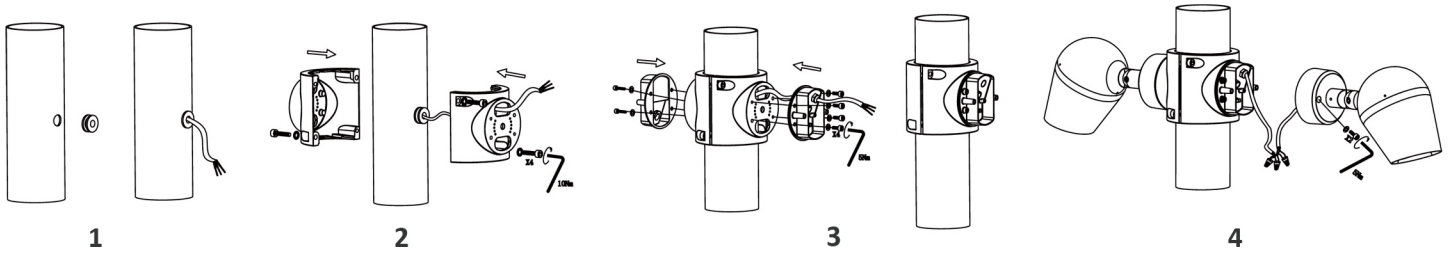

INSTALLATION DETAILS - B

