


S-1094



S-1094/WL

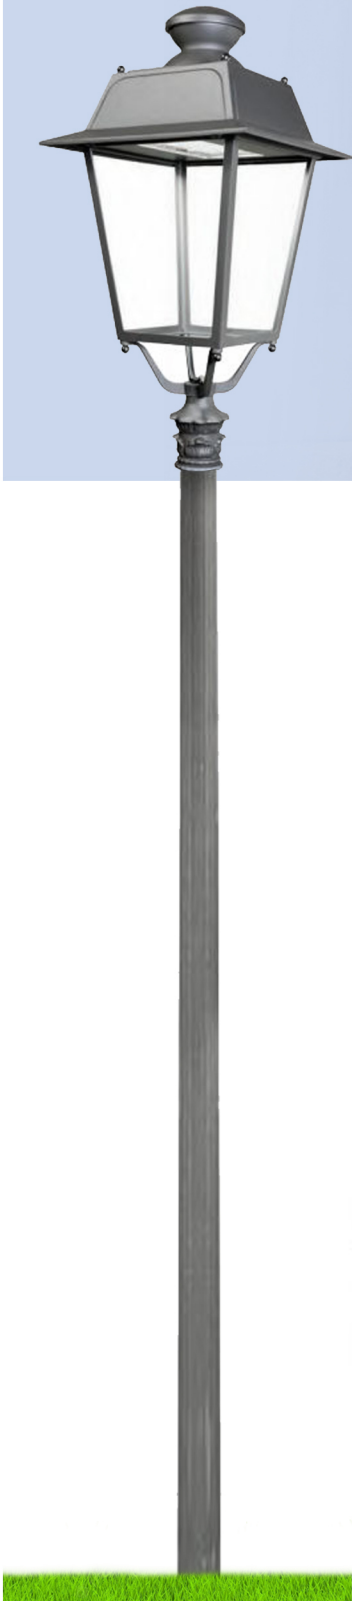

**DESCRIPTION:**

External lighting Pole mounted luminaire,  
Body made of die-cast aluminium with polyester powder coated finish.

Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.

Diffuser made of vandal resistant, V2 self-extinguishing, Uv-stabilized polycarbonate.

Louver made of anodized aluminium

High corrosion resistant capability  
silicon rubber gasket for dust & waterproof

Stainless steel alloy screws

Power supply: 240V/50Hz

- Heat resistant and solid conduct wiring
- Ideal for external garden and area lighting
- European standard of EN 60598

**POLE:**

Column made of Hot Deep Galvanized steel with epoxy cationic eletro-coating, upon phospho-chromate treatment, Uv-stabilising primer with powder coated surface finish.  
Extruded aluminium pole available on request.

**Color Selection**



**BROADWAY - UK Ltd.**

3030

Item No:	S-1094				
Rated Power	25W	30W	40W	50W	60W
LED Qty	32pcs	40pcs	60pcs	72pcs	86pcs
LED Type	PHILIPS/OSRAM/MEAN WELL/SOSEN/MOONS/INVENTRONICS				
Input Voltage	AC100-277V, 50-60Hz				
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
THD	<20%	<20%	<20%	<20%	<20%
Color Temperature	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	>80	>80	>80	>80	>80
Beam Angle	45×135° 80×150° 45×145° 35×155° 45×155° 60×145° 60×155°				
Luminous Flux	110-130lm/W	110-130lm/W	110-130lm/W	110-130lm/W	110-130lm/W
Temp. in Working	-35°C +50°C	-35°C +50°C	-35°C +50°C	-35°C +50°C	-35°C +50°C
Protection	IP66, IK09	IP66, IK09	IP66, IK09	IP66, IK09	IP66, IK09
Dimmer	1-10V Dimmer, Clock Dimmer, PWM Dimmer, DALI Dimmer				
Photcell	√ (available)				
Driver	Cree J series, Lumileds Luxeon 3030, Samsung 3030, Lumileds Luxeon 5050				
Life Time	100000Hrs				



5050

Item No:	S-1094				
Rated Power	25W	30W	40W	50W	60W
LED Qty	12pcs	15pcs	20pcs	24pcs	30pcs
LED Type	PHILIPS/OSRAM/MEAN WELL/SOSEN/MOONS/INVENTRONICS				
Input Voltage	AC100-277V, 50-60Hz				
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
THD	<20%	<20%	<20%	<20%	<20%
Color Temperature	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	>80	>80	>80	>80	>80
Beam Angle	45×135° 80×150° 45×145° 35×155° 45×155° 60×145° 60×155°				
Luminous Flux	110-130lm/W	110-130lm/W	110-130lm/W	110-130lm/W	110-130lm/W
Temp. in Working	-35°C +50°C	-35°C +50°C	-35°C +50°C	-35°C +50°C	-35°C +50°C
Protection	IP66, IK09	IP66, IK09	IP66, IK09	IP66, IK09	IP66, IK09
Dimmer	1-10V Dimmer, Clock Dimmer, PWM Dimmer, DALI Dimmer				
Photcell	√ (available)				
Driver	Cree J series, Lumileds Luxeon 3030, Samsung 3030, Lumileds Luxeon 5050				
Life Time	100000Hrs				

