




**DESCRIPTION:**

External garden or walkway bollard luminaire,  
 Body made of die-cast aluminium with polyester powder  
 Coated finish.  
 Epoxy cationic electro-coating, upon phospho-chromate  
 treatment, Uv-stabilising primer  
 Diffuser made of vandal resistant, V2 self extinguishing,  
 Uv-stabilized polycarbonate, PMMA, Opal.  
 High corrosion resistant capability  
 Silicon rubber gasket for dust & water proof  
 Stainless steel alloy screws.  
 High quality LED chip by Osram  
 Power supply: AC100-277V/50Hz  
 -Heat resistant and solid conduct wiring  
 -Ideal for external garden and area lighting  
 -European standard of EN 60598

Model No:	S1987 / S1993		S1987 / S1993	
Power	10W LED	12W LED	18W LED	22W LED
LED Type	SMD	SMD	E27	SE27
Voltage	AC100-277V / 50-60Hz		AC220-240V / 50-60Hz	
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W	100-110LM/W
Color Temperature	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
CRI	>80	>80	>80	>80
Power Factor	>0.95	>0.95	>0.95	>0.95
Working Temp	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C
Protection	IP65	IP65	IP65	IP65
Life Span	50000Hrs		-	

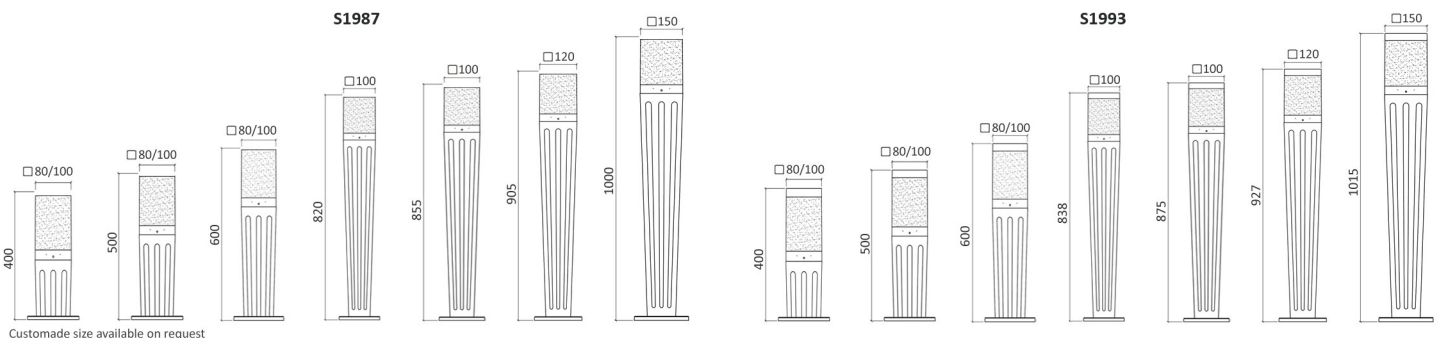

Custommade size available on request