





B835060A

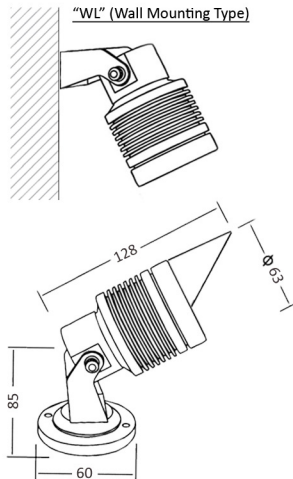


B835060B




Available:



Beam Angle:



Finish:



DESCRIPTION:

External elevation or garden luminaire,
 Body made of aluminium alloy in natural finish,
 Electro coating static powder coated available in option
 (Black, White, Grey).
 Tempered clear glass diffuser.
 Pure aluminium anodized reflector for better light
 distribution.
 High corrosion resistance capability.
 silicon gasket for dust and water proofing.
 Stainless steel alloy screws.
 Power supply 220V-240V/50Hz
 -Heat resistant wiring
 -Ideal for external Garden / elevation lighting
 -European standard of EN 60598

Dimming Options:

DALI & DSI Dimming 1 ~ 10 V Dimming

Cable Gland: Nickel coated copper

Power Cable:

H05RN-F 2X1.0mm² L=0.5M (low voltage)
 H05RN-F 3X0.75mm² L=0.5M (high voltage)
 H05RN-F 5X0.5mm² L=0.5M (RGB 3 in 1, RGB 4 in 1)





Product Code	B835060A	B835060B	B835060C	B835060D
Rated Power	2W - 8W LED	2W-8W LED	2W-8W LED	2W-8W LED
LED Type	CREE	CREE	CREE	CREE
Product Size	DIA: 63x128x85mm	DIA: 63x92x85mm	DIA: 63x92x263mm	DIA: 63x128x263mm
Input Voltage	AC220 -240V / 12V / 24V			
Frequency Range	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz
Power Factor	>0.95	>0.95	>0.95	>0.95
Color Temperature	2700K-6500K / RGB	2700K-6500K / RGB	2700K-6500K / RGB	2700K-6500K / RGB
Control Mode	RGB 3 in 1 / RGB 4 in 1, DMX512			
Color Rendering Index	>80	>80	>80	>80
Mini Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Beam Angle	18/24/38/60°	18/24/38/60°	18/24/38/60°	18/24/38/60°
Temp. in Working	20°C +50°C	-20°C +50°C	-20°C +50°C	-20°C +50°C
Protection Grade	IP66	IP66	IP66	IP66
Life Span	50000Hrs			





*RGB version available on request. Order Code Extension: "RGB"

PHOTMETRIC DATA



18°

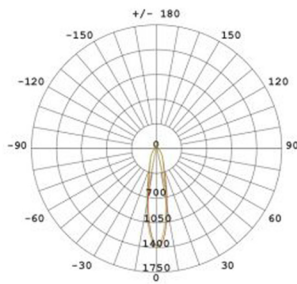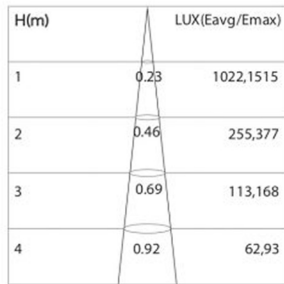

24°

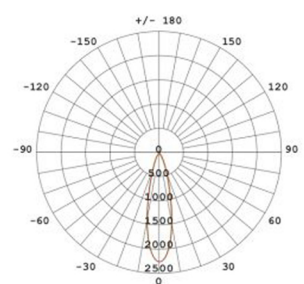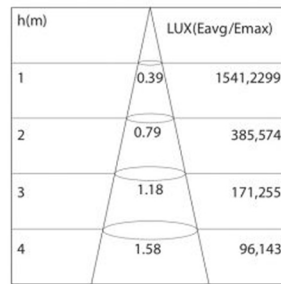

38°

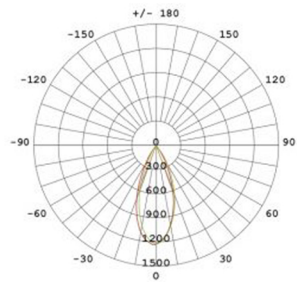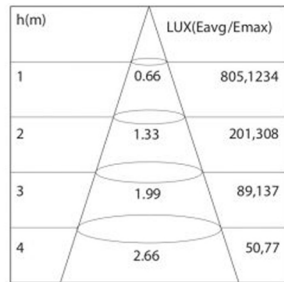

60°

