





BR-7710B

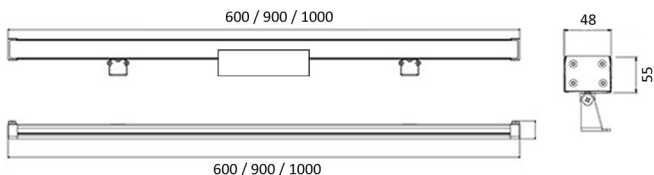

Available:

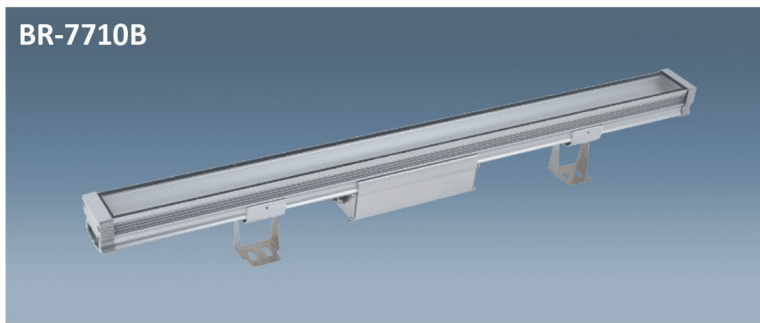

Dimming Options:

DALI, DSI Dimming, 0~10 V Dimming

Model	BR-7710B-20W	BR-7710B-30W	BR-7710B-36W
Power	20W LED	30W LED	36W LED
Input Voltage	DC24V	DC24V	DC24V
CRI	≥80	≥80	≥80
Luminous Flux	100-110LM/W	100-110LM/W	100-110LM/W
Color Temp.	2200-6500K / RGB	2200-6500K / RGB	2200-6500K / RGB
Power Factor	>0.95	>0.95	>0.95
Temp. in Working	-20°C +50°C	-20°C +50°C	-20°C +50°C
Humidity of Working	<95%	<95%	<95%
THD	<20%	<20%	<20%
Beam Angle	15/25 /30 /45 /60°	15/25 /30 /45 /60°	15/25 /30 /45 /60°
Life Span	45000-50000Hrs		
Size	L600/L900/L1000*W48*H55mm		

Custom made size and wattage available on request



DESCRIPTION:

Surface mounted LED wall washer luminaire
 Body made of extruded aluminium, natural finish,
 Electro powder coated in silver, black, white, grey finish
 Tempered clear glass diffuser, thermal shock, impact resistance.

Stainless steel cable gland and silicon rubber gasket for water and dustproof.

Waterproof male and female connector for serial connection

Constant current output Driver

Operating temperature -25°C +65°C

Ideal for exterior facade lighting

European standard of EN 60598

