





DESCRIPTION:

- Recessed mounted mini buried uplight
- Body made of aluminium (6063) and acrylic face ring
- Opal / Frosted diffuser
- High corrosion resistance capability.
- Stainless steel gland
- Silicon gasket for dust and waterproofing.
- Stainless steel alloy screws
- Power supply: 220V-240V/50Hz
- Heat resistant and solid conduct wiring
- Ideal for External Garden, Interior application
- European standard of EN 60598

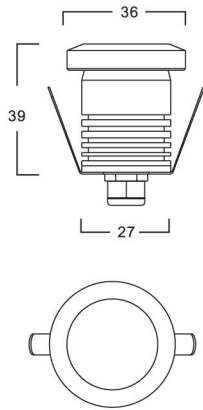

INSTALLATION METHOD

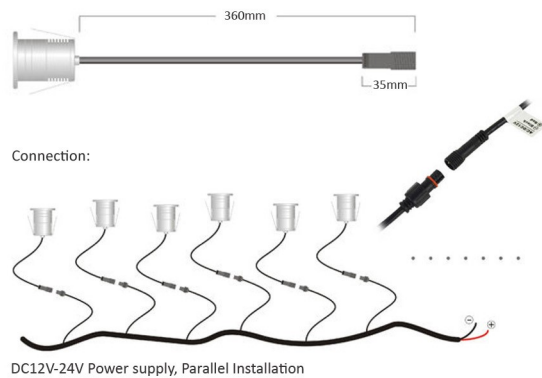

Model:	IDL00A-1	IDL00A-1	IDL00A-1
Power	1W LED	2W LED	3W LED
Input Voltage	DC12V / 24V	DC12V / 24V	DC12V / 24V
CRI	≥80	≥80	≥80
Luminous Flux	90LM/W	90LM/W	90LM/W
Color Temp.	2700-6500K / RGB	2700-6500K / RGB	2700-6500K / RGB
Power Factor	>0.95	>0.95	>0.95
Temp. in Working	-20°C +50°C	-20°C +50°C	-20°C +50°C
Beam Angle	180°	180°	180°
Protection	IP67	IP67	IP67
Life Span	35000Hrs	35000Hrs	35000Hrs

