




DESCRIPTION:

- Recessed mounted directional pathway luminaire,
- Body & Frame made of solid stainless steel (304/316)
- Tempered clear / frosted glass diffuser
- High corrosion resistance capability.
- Stainless steel gland
- PC Recessed sleeve for easy installation.
- Silicon gasket for dust and water proofing
- Stainless steel alloy screws
- Power supply: 220V-240V/50Hz
- Heat resistant and solid conduct wiring
- Ideal for External use
- European standard of EN 60598




RDSX700-D01
RDSX800-D01
RDSX900-D01



Available:



LED SPEC			
Power	1W LED	2W LED	3W LED
Input Voltage (DP)	AC85-265V	AC85-265V	AC85-265V
input voltage (LV)	DC24V / 12V	DC24V / 12V	DC24V / 12V
CRI	≥80	≥80	≥80
Luminous Flux	110LM/W	110LM/W	100LM/W
Color Temp.	2700-6500K	2700-6500K	2700-6500K
Power Factor	≥0.95 °	≥0.95 °	≥0.95 °
Temp. in Working	-20 C +50 C	-20 C +50 C	-20 C +50 C
Life Span		50000Hrs	

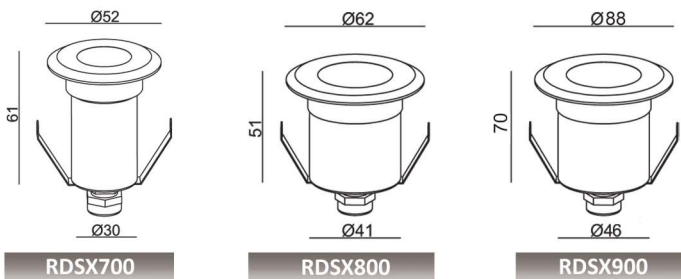

PHOTOMETRIC DATA

