





TM170170-D1

TM170170-1S

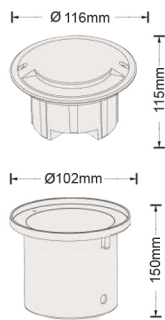


TM170170-1M

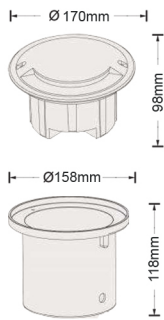


TM170170-D2

TM170170-2S

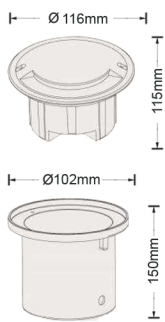


TM170170-2M

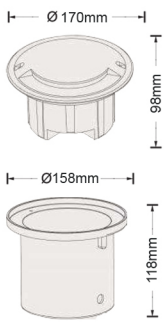


TM170170-D4

TM170170-4S


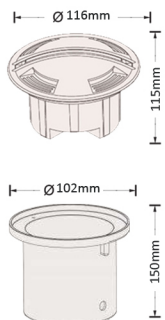


TM170170-4M

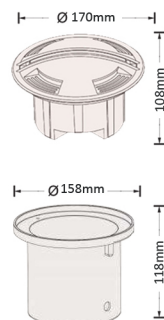


DESCRIPTION:


Recessed mounted floor wash pathway luminaire,
 Body & Frame made of solid stainless steel (316 Grade)
 Tempered clear / frosted glass diffuser
 High corrosion resistance capability.
 Stainless steel PG gland
 Mounting sleeve made of ABS
 Stainless steel alloy screws
 Power supply: 100V-240V/50Hz, low voltage input power
 In DC12V/24V with remote drive available on request
 - Heat resistant and solid conduct wiring
 - Ideal for External use
 - European standard of EN 60598

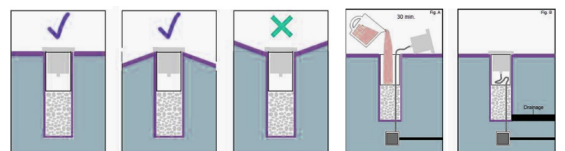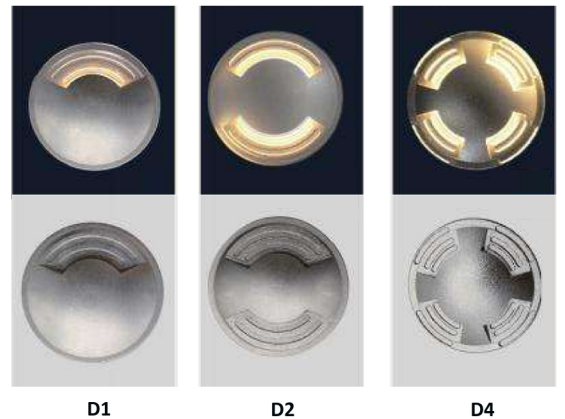


Product Code	TM170170-1S / 1M / 2S / 2M / 4S / 4M			
Rated Power	6W LED	8W LED	10W LED	15W LED
LED Type	CREE COB LED	CREE COB LED	CREE COB LED	CREE COB LED
Luminous Flux	90LM/W	90LM/W	90LM/W	90LM/W
Color Temperature	2700K - 6500K / RGB	2700K - 6500K / RGB	2700K - 6500K / RGB	2700K - 6500K / RGB
CRI	>80	>80	>80	>80
Glass pressure capacity	SS304 / SS316	SS304 / SS316	SS304 / SS316	SS304 / SS316
Efficiency	>85%	>85%	>85%	>85%
Temperature in working	(-) 20°C - (+) 40°C	(-) 20°C - (+) 40°C	(-) 20°C - (+) 40°C	(-) 20°C - (+) 40°C
Input Voltage	DC24V (Order Code: BV) Remote Drive required			
	AC100-240V (Order Code: BH)			
Power Cable	H05RN-F 2x0.75mm ² L=0.5m (low voltage) H05RN-F 3x0.75mm ² L=0.5m (Single color/high voltage) H05RN-F 4x0.75mm ² L=0.5m (for RGB)			
Size	116x116x150mm / 170x170x118mm			
Protection Grade	IP67 / IK10	IP67 / IK10	IP67 / IK10	IP67 / IK10
Life Span	50000Hrs			

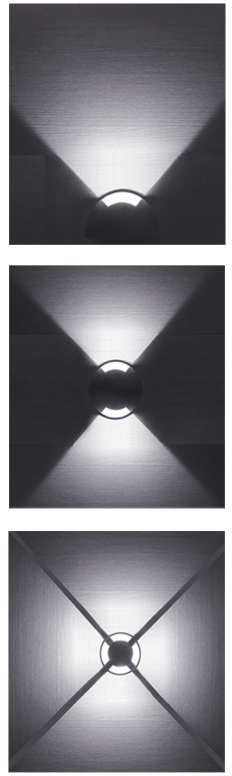


PHOTMETRIC DATA

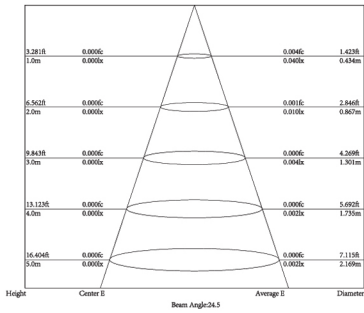


Lux distance Curve (1x20° * 25°)

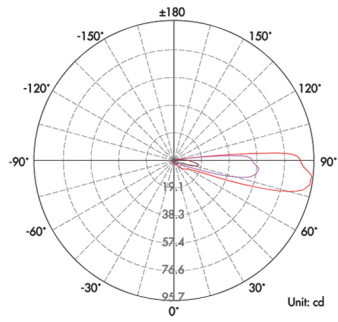


Lux distribution Curve (1x20° * 25°)

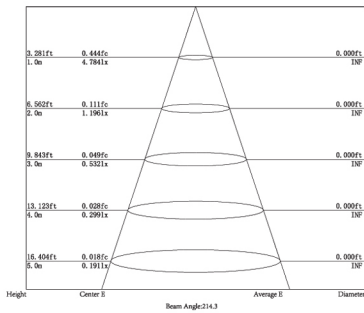


Lux distance Curve (2x20° * 25°)

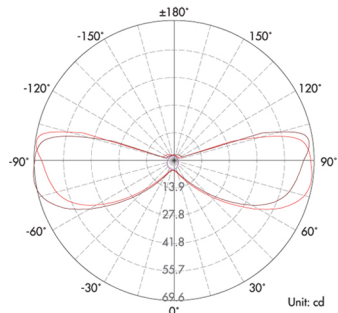

Lux distribution Curve (2x20° * 25°)

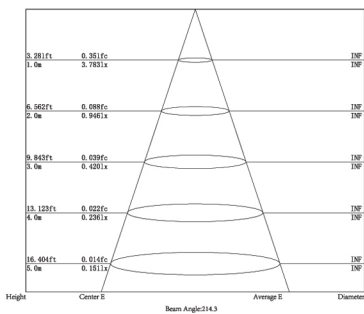

Lux distance Curve (4x20° * 25°)

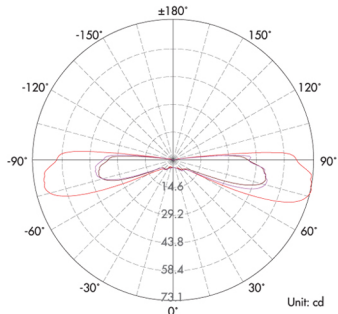

Lux distribution Curve (4x20° * 25°)



Available:

