






WML0092



WML0092L



**Photometric Data**

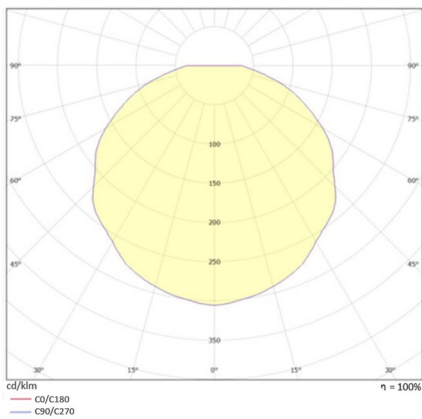

**DESCRIPTION:**

- Surface mounted bulkhead luminaire
- Body made of die-cast aluminium with polyester powder coated finish.
- Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.
- Diffuser made of vandal resistant, V2 self extinguishing, Uv-stabilised polycarbonate.
- Reflector made of anodized aluminium
- High corrosion resistant capability
- Silicon rubber gasket for dust proof
- Stainless steel alloy screws
- Power supply: 240V/50Hz
- Heat resistant and solid conduct wiring
- Ideal for external lighting
- European standard of EN 60598

Available:



Model No:	WML0092				WML0092L		
Power	9W LED	12W LED	15W LED	18W LED	24W LED	30W LED	36W LED
LED Type	SMD	SMD	SMD	SMD	SMD	SMD	SMD
Voltage	AC86-265V	AC86-265V	AC86-265V	AC86-265V	AC86-265V	AC86-265V	AC86-265V
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Color Temperature	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
CRI	>80	>80	>80	>80	>80	>80	>80
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
Working Temp	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C
Beam Angle	120°	120°	120°	120°	120°	120°	120°
Size	200x200x50mm	200x200x50mm	200x200x50mm	200x200x50mm	360x360x75mm	360x360x75mm	360x360x75mm
Lif Span	50000Hrs						