




## DESCRIPTION:

Recessed floor mounted outdoor linear light  
 Body made of extruded aluminium (Marine grade)  
 Grey powder coated, T=50-55pmm or natural aluminium finish.  
 Tempered glass 6mm thickness, thermal shock, impact resistance.  
 All-in-one optical lens, efficiency>85%  
 Waterproof cable gland, IP68 PG-9 copper & nickel coated.  
 Waterproof seal molding shaped double silicone seal.  
 Constant current output Driver.  
 High lumen chip Epistar, Bridgelux and CREE.  
 Single color LED=1-circuit output  
 RGB 3 In 1 LED=3 circuit output  
 Working temperature -10°C ~ 60°C  
 Mounting sleeve: Aluminium casing  
 European standard of EN 60598

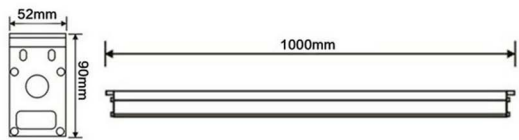

Available:

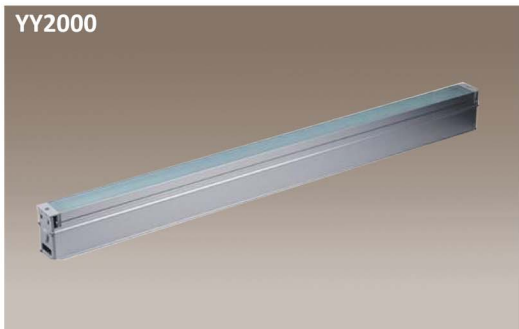

Asymmetrical Beam Angle available on request (Refer Page: A12B1)

## Remarks:

- (1) Tempered glass cover, transmittance is above 93%
- (2) Provides better heat dissipation through increasing the rigid bar area for ventilation
- (3) High efficiency LEDs has high CRI and luminous flux.
- (4) LED driver is customized when the circumstance of working temperature is below 0°C
- (5) Use only switching power supply or coiled transformer for 24VDC power input
- (6) Customized 316" stainless steel frame available on request.

## Dimming Options:

DALI & DSI Dimming 1~10 V Dimming

Model	YY2000-12	YY2000-15	YY2000-18	YY2000-24	YY2000-36
Power	12W LED	15W LED	18x1W LED	24x1W LED	36x1W LED
LED Type	EPISTAR	EPISTAR	HP CREE	HP CREE	HP CREE
Input Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Dimension	1000x52x90mm	1000x52x90mm	1000x52x90mm	1000x52x90mm	1000x52x90mm
Color Temp.	2700K-6000K/RGB	2700K-6000K/RGB	2700K-6000K/RGB	2700K-6000K/RGB	2700K-6000K/RGB
CRI	>80	>80	>80	>80	>80
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Beam Angle	8/15/30/45/60°	8/15/30/45/60°	8/15/30/45/60°	8/15/30/45/60°	8/15/30/45/60°
Working Temp.	-30° +50°C	-30° +50°C	-30° +50°C	-30° +50°C	-30° +50°C
IP Grade	IP67	IP67	IP67	IP67	IP67
Life Span			50000Hrs		
Warranty			Three Years		

Custom size / Wattage on request




Anti glare lower version

**SYMMETRICAL (Order Code: SYM)**




Angle: 8 / 15 / 30 / 45 / 60°  
Polarized Angle: 0°

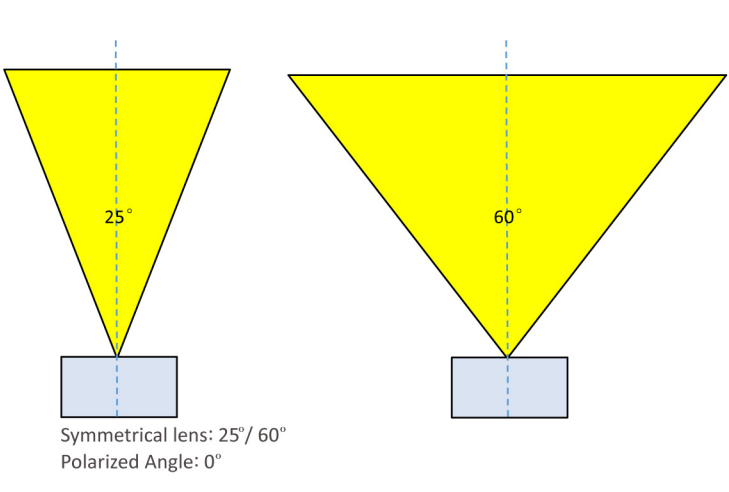


**Anti-glare louver**

Honeycomb louver available on request

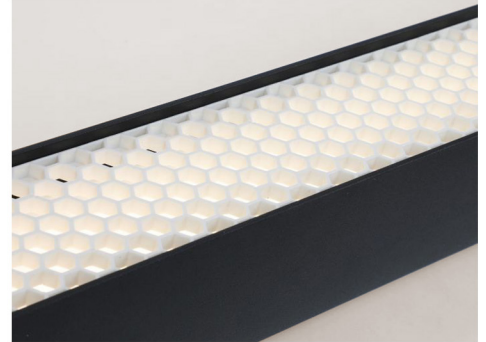

Order Code: HCL

**ASYMMETRICAL (Order Code: ASY)**

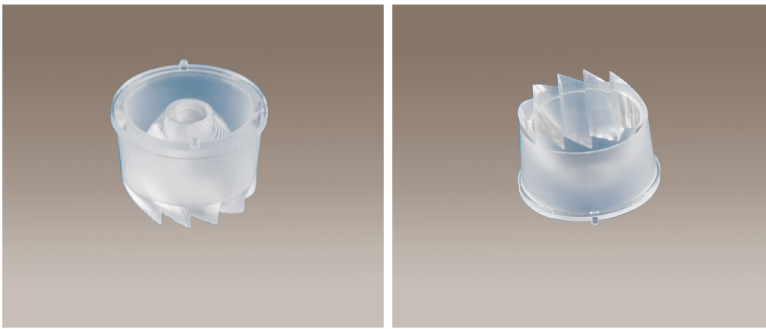

Angle: 8 / 15 / 30 / 45 / 60°  
Polarized Angle: 15° / 25°

