



300/400/500/600/780mm

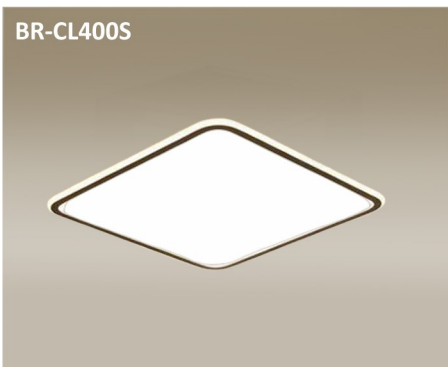

### DESCRIPTION:

- Surface mounted bulkhead luminaire
- Body made of aluminium with polyester powder coated finish.
- Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer.
- Diffuser made of, opal, prismatic, acrylic
- High corrosion resistant capability
- Silicon rubber gasket for dust proof
- Stainless steel alloy screws
- Power supply: 240V/50Hz
- Heat resistant and solid conduct wiring
- Ideal for Internal lighting
- European standard of EN 60598

Available:



Model No:	BR-CL400R					BR-CL400S	
Power	28W LED	38W LED	48W LED	72W LED	100W LED	46W LED	60W LED
LED Type	SMD	SMD	SMD	SMD	SMD	SMD	SMD
Voltage	AC220-240V	AC220-240V	AC220-240V	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W
Color Temperature	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
CRI	>80	>80	>80	>80	>80	>80	>80
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
Working Temp.	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C	-30 ~ +50°C
Protection	IP54	IP54	IP54	IP54	IP54	IP54	IP54
Size	∅300xH25mm	∅400xH25mm	∅500xH25mm	∅600xH25mm	∅780xH25mm	L400xW400xH25mm	L500xW500xH25mm
Life Span	50000Hrs						