




DMD24B-T9



DMD24B-T18



DMD24B-T24



DESCRIPTION:

Recessed mounted buried adjustable focusing LED Uplight.
 Body made of die-cast aluminium, powder coated, high Corrosion resistance capability.
 Solid stainless steel frame in 316 Grade.
 Tempered clear glass diffuser in 10mm thickness.
 Resistance to thermal shock.
 Silicon gasket for dust and waterproofing.
 Stainless steel alloy screws.
 High quality LED Chip.
 Power supply: 85V-265V/50Hz,
 Low voltage input power in DC12V/24V with remote drive, DMX512 and DALI available on request.
 - Heat resistant and solid conduct wiring
 - Ideal for External use
 - European standard of EN 60598





DMD24B-T9

DMD24B-T18




DMD24B-T24



Product Code	DMD24B-T6	DMD24B-T9	DMD24B-T18	DMD24B-T24	DMD24B-T36
Rated Power	6W - 12W LED	9W - 18W LED	18W - 36W LED	24W / 36W - 48W LED	36W / 48W - 72W LED
LED Type	SMD	SMD	SMD	SMD	SMD
LED Qty.	6Pcs.	9Pcs.	18Pcs.	24Pcs.	36Pcs.
Luminous Flux	100-130LM/W	100-130LM/W	100-130LM/W	100-130LM/W	100-130LM/W
Color Temperature	2700K - 6500K / RGB / RGBW	2700K - 6500K / RGB / RGBW	2700K - 6500K / RGB / RGBW	2700K - 6500K / RGB / RGBW	2700K - 6500K / RGB / RGBW
CRI	>80	>80	>80	>80	>80
SS Grade	SS304 / SS316	SS304 / SS316	SS304 / SS316	SS304 / SS316	SS304 / SS316
Temperature in working	(-)20° C - (+)40° C	(-)20° C - (+)40° C	(-)20° C - (+)40° C	(-)20° C - (+)40° C	(-)20° C - (+)40° C
Input Voltage	AC85-2265V (Order Code: BH) / DC24V (Order Code: BV) Remote Drive required				
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
Size	Ø150xH145mm	Ø180xH158mm	Ø210xH168mm	Ø230xH178mm	Ø260xH198mm
Cut Size	Ø143mm	Ø168mm	Ø198mm	Ø218mm	Ø245mm
Protection Grade	IP67 / IK10	IP67 / IK10	IP67 / IK10	IP67 / IK10	IP67 / IK10
Life Span	50000Hrs				



LIGHT DISTRIBUTION DIAGRAM

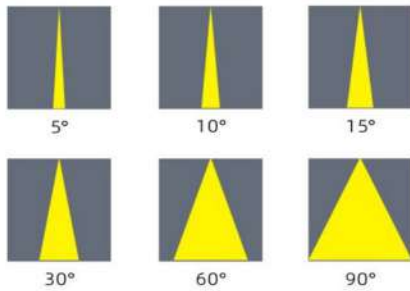

PHOTOMETRIC DATA

