



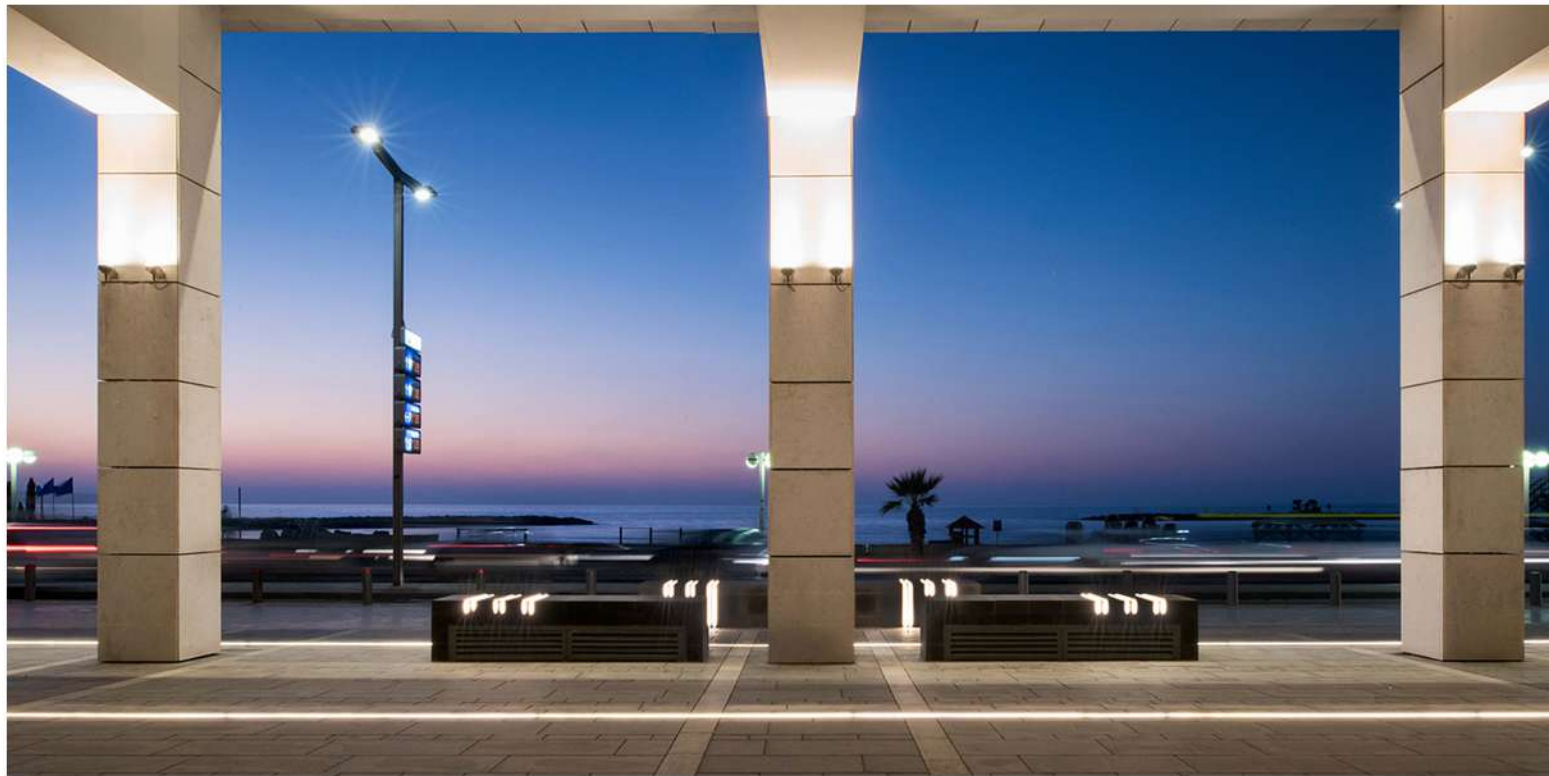

YD5060

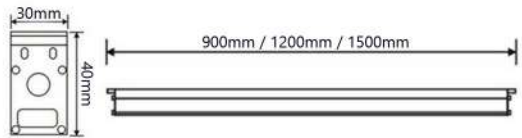

Unrestricted connection

1. Multiple Luminaire can be connected in serial
2. DC24V input



High Impact Diffuser



High-Quality LED Chip



Male female connector



High temperature resistant joint



Waterproof rubber head




DESCRIPTION:

Recessed floor mounted outdoor linear light
Body made of extruded aluminium in powder coated, natural aluminium available on request.
Tempered frosted glass, thermal shock, impact resistance.
All-in-one optical lens, efficiency>85%
Waterproof cable gland, IP68 PG-9
Waterproof seal molding shaped double silicone seal.
Constant current output Driver.
High lumen chip Bridgelux, Osram and CREE.
RGB 3 In 1 LED=3 circuit output
Working temperature -10°C ~ 60°C
Mounting sleeve: Aluminium casing
European standard of EN 60598

Available:



Photometric Data

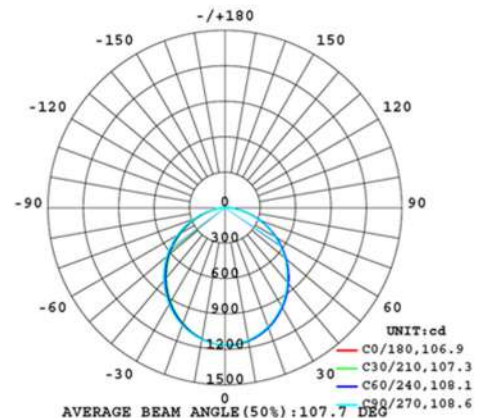

Model	YD5060-12	YD5060-24	YD5060-36
Power	12W LED	24W LED	36W LED
LED Type	OSRAM	OSRAM	OSRAM
Input Voltage	DC24V	DC24V	DC24V
Dimension	30x40xL900mm	30x40xL1200mm	30x40xL1500mm
Color Temp.	2700K-6000K/RGB	2700K-6000K/RGB	2700K-6000K/RGB
CRI	>80	>80	>80
Luminous Flux	90-100LM/W	90-100LM/W	90-100LM/W
Beam Angle	15°/30°/45°/60°	15°/30°/45°/60°	15°/30°/45°/60°
Working Temp.	-25°+ 50°C	-25°+ 50°C	-25°+ 50°C
IP Grade	IP67	IP67	IP67
Life Span		50000Hrs.	

Note: Custom wattage and size available on request.