



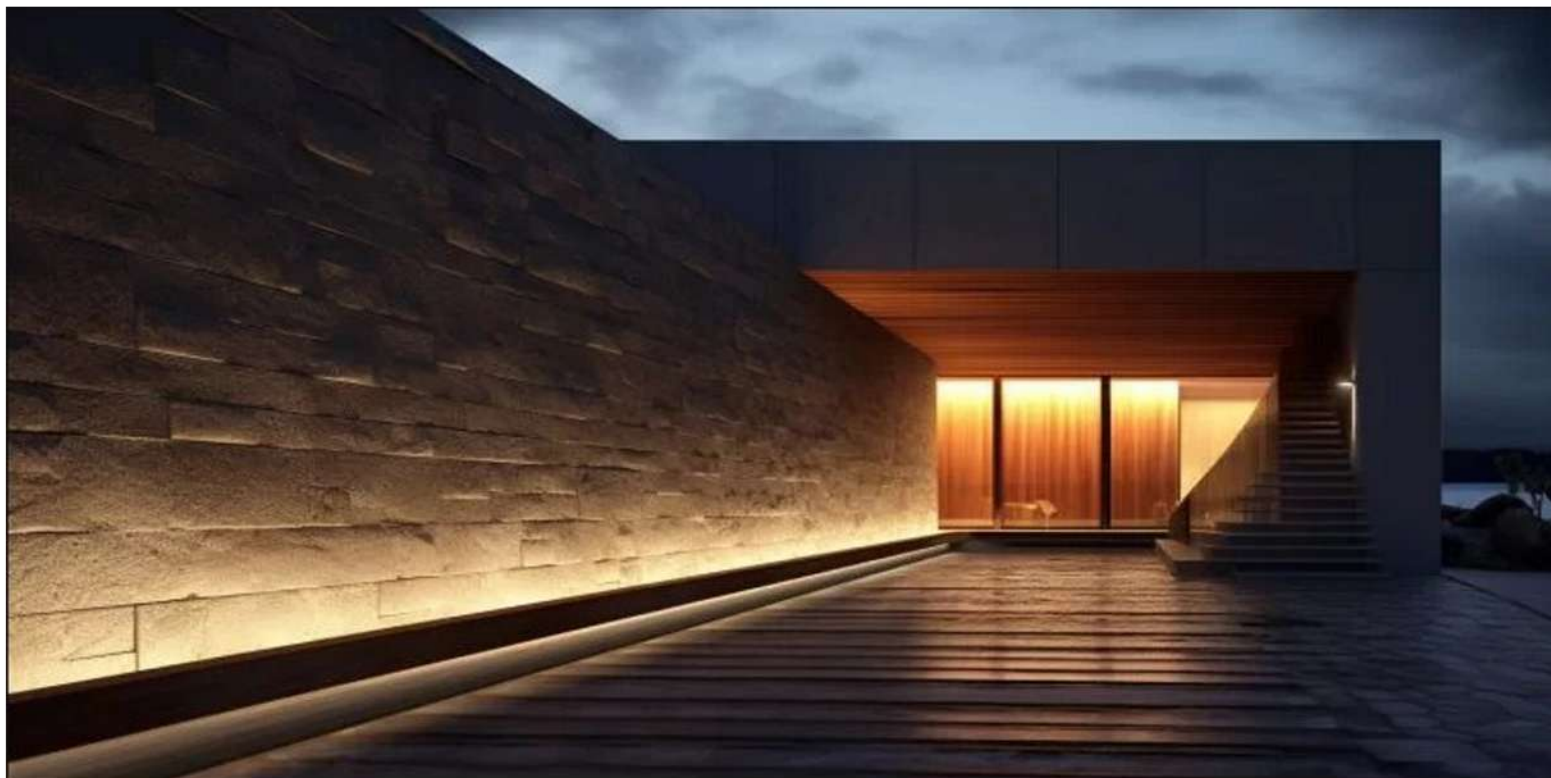



DMD3565/***




DESCRIPTION:

Recessed mounted inground linear uplight.
Body made of extruded aluminium in powder coated,
Natural aluminium available on request.
Tempered glass, thermal shock, impact resistance.
All-in-one optical lens, efficiency>85%
Waterproof cable gland, IP68 PG-9
Waterproof seal molding shaped double silicone seal.
Constant current output Driver.
High lumen chip Osram, Philips and CREE.
RGB 3 In 1 LED=3 circuit output
Working temperature -10°C ~ 60° C
Mounting sleeve: Aluminium casing
European standard of EN 60598

DMD5070/***

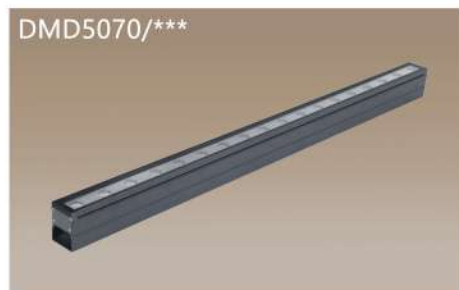


DMT7570/***




Available:



Beam Angle:

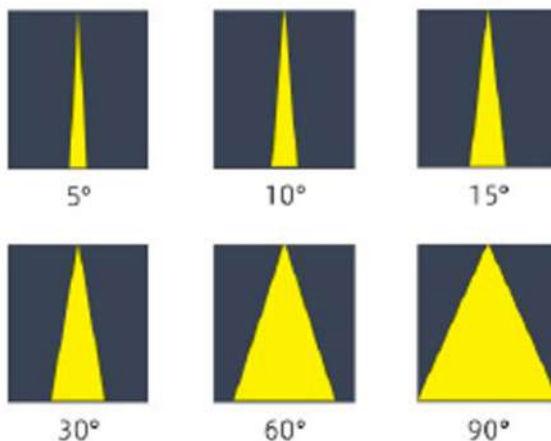


Optional Accessories:



Honey Comb Louver
Order Code: "HCL"



Anti-Glare Flap
Order Code: "AG"




Polarized light reduces glare, improves clarity,
and delivers focused, comfortable illumination.

Product Code	DMD3565/**	DMD5070/**	DMT7570/**
Wattage	18W / 24W / 36W / 48W LED	18W / 24W / 36W / 48W LED	18W / 24W / 36W / 48W LED
LED Type	OSRAM / CREE	OSRAM / CREE	OSRAM / CREE
LED Qty	18 / 24Pcs	18 / 24 / 36Pcs	18 / 24 / 36Pcs
Input Voltage	DC24V	DC24V	DC24V
Frequency Range	50 - 60Hz	50 - 60Hz	50 - 60Hz
Color Temperature	2700-6500K / RGB / RGBW	2700-6500K / RGB / RGBW	2700-6500K / RGB / RGBW
CRI	>80	>80	>80
Power Factor	>0.90	>0.90	>0.90
Luminous Flux	100-130LM/W	100-130LM/W	100-130LM/W
Beam Angle	5°/10°/15°/30°/60°/90°/15x45°/10x60	5°/10°/15°/30°/60°/90°/15x45°/10x60	5°/10°/15°/30°/60°/90°/15x45°/10x60
Temperature in Working	-40°C ~ 55°C	-40°C ~ 55°C	-40°C ~ 55°C
Control Mode	ON-OFF / DMX512 / DALI	ON-OFF / DMX512 / DALI	ON-OFF / DMX512 / DALI
Safety Level	I - III	I - III	I - III
Protection	IP67	IP67	IP67
Size	1000xW35xH65mm	1000xW50xH70mm	1000xW75xH70mm
Life Span	50000Hrs	50000Hrs	50000Hrs




Note: Custom size and wattage available on request.

Photometric Data

Luminous emittance 1 / Linear LDC

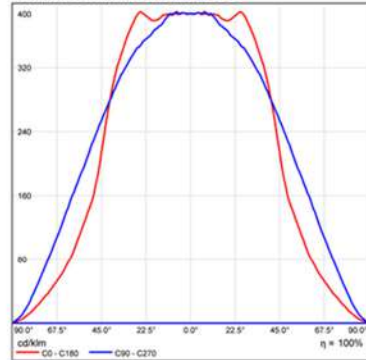

Luminous emittance 1 / Luminance diagram

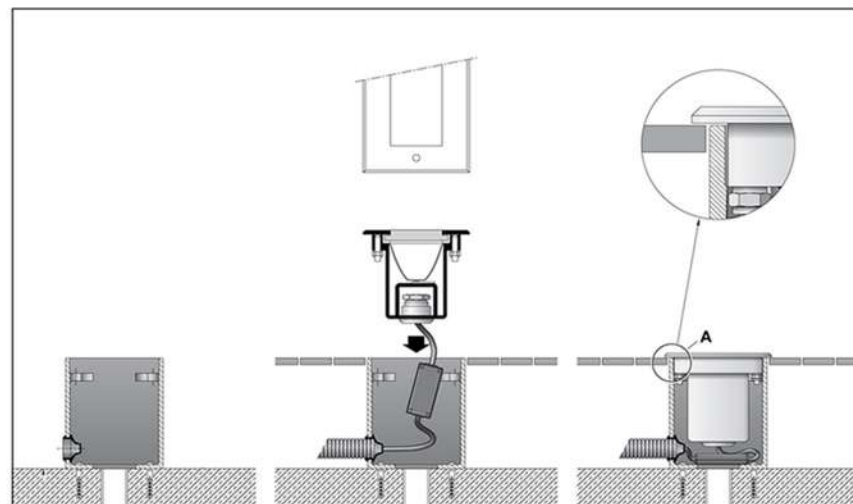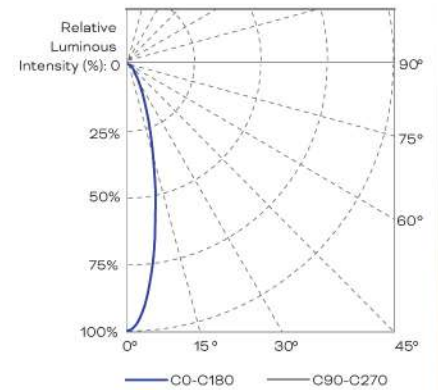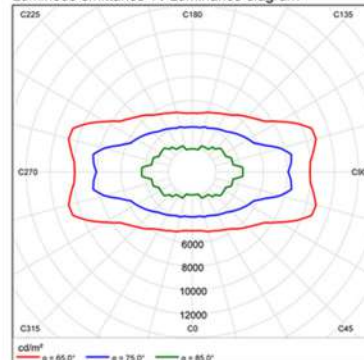

Male female connector



High temperature resistant joint



Waterproof rubber head

