


**DESCRIPTION:**

Recessed mounted asymmetrical indirect ramp lights  
 Body made of die-cast aluminium with polyester powder Coating applied after a phosphochromate treatment.  
 Diffuser made of tempered glass, resistant to impact and Thermal shock.  
 PC Recessed mounting box for easy installation.  
 High corrosion resistance capability.  
 Stainless steel alloy screws.  
 Power supply 240V/50Hz  
 - Heat resistant wiring  
 - Ideal for external indirect lighting  
 - European standard of EN 60598

**PHOTOMETRIC DATA**

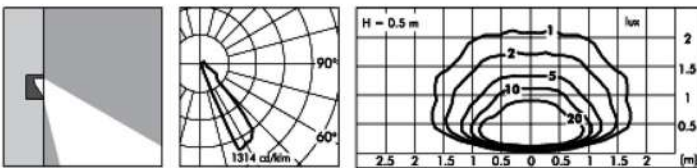

| Model No.             | BD20-6W      | BD20-8W      | BD20-10W     |
|-----------------------|--------------|--------------|--------------|
| Rated Power           | 6W LED       | 8W LED       | 10W LED      |
| LED Type              | SMD LED      | SMD LED      | SMD LED      |
| Product Size          | 200x200x60mm | 200x200x60mm | 200x200x60mm |
| Input Voltage         | AC85-265V    | AC85-265V    | AC85-265V    |
| Frequency Range       | 50Hz-60Hz    | 50Hz-60Hz    | 50Hz-60Hz    |
| Power Factor          | >0.95        | >0.95        | >0.95        |
| Color Temperature     | 2700K-6500K  | 2700K-6500K  | 2700K-6500K  |
| Color Rendering Index | >80          | >80          | >80          |
| Mini Luminous Flux    | 100LM/W      | 100LM/W      | 100LM/W      |
| Temp. in Working      | 20 C +50° C  | 20 C +50° C  | 20 C +50° C  |
| Protection Grade      | IP65         | IP65         | IP65         |
| Life Span             |              | 50000Hrs     |              |

**INSTALLATION**

