





BR-C4316



BR-C3316




DESCRIPTION

External garden or walkway bollard luminaire,
 Body made of die-cast aluminium with electro static
 Powder coated painting in black, grey or silver Finish.
 Epoxy cationic electro-coating, upon phospho-chromate
 Treatment, UV-stabilizing primer.
 Diffuser made of vandal resistant, V2 self extinguishing,
 UV-stabilized tempered clear glass thermal shock and
 Impact resistant.
 High corrosion resistant capability
 Silicon rubber gasket for dust & water proof
 Stainless steel alloy screws.
 High quality COB LED chip
 Power supply: AC100-277V/50Hz
 -Heat resistant and solid conduct wiring
 -Ideal for external garden and area lighting

Available:



Photometric Data

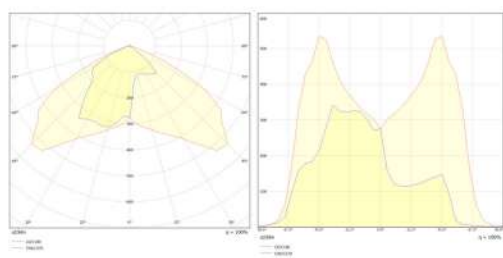

Model No	BR-C3316 / BR-C4316		
Power	5W LED	10W LED	15W LED
LED Type	COB	COB	COB
Voltage	AC100-277V / 50-60Hz		
Luminous Flux	100-120lm/w	100-120lm/w	100-120lm/w
Color Temperature	3000K - 6500K	3000K - 6500K	3000K - 6500K
CRI	>80	>80	>80
Power Factor	>0.95	>0.95	>0.95
Working Temp	-30° to +50 C	-30° to +50 C	-30° to +50 C
Protection	IP65	IP65	IP65
Life Span	50000Hrs		