




BR-DB162

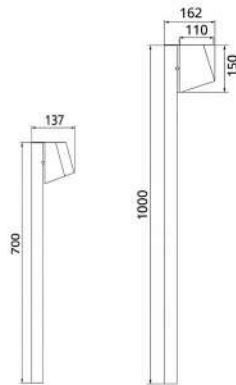

**DESCRIPTION:**

External garden or walkway bollard luminaire,  
Body made of die-cast aluminium with polyester powder Coated finish.

Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer

Diffuser made of tempered glass, thermal shock and Impact resistant.

High corrosion resistant capability

Silicon rubber gasket for dust & water proof

Stainless steel alloy screws.

High quality COB LED chip

Power supply: AC100-260V/50Hz

-Heat resistant and solid conduct wiring


-Ideal for external garden and area lighting

-European standard of EN 60598

Available:



BR-DB172

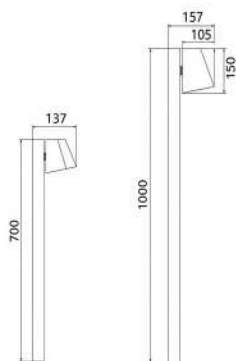

| Model No:         | BR-DB162 / BR-DB172  |              |              |
|-------------------|----------------------|--------------|--------------|
| Power             | 5W LED               | 10W LED      | 15W LED      |
| LED Type          | COB                  | COB          | COB          |
| Voltage           | AC100-260V / 50-60Hz |              |              |
| Luminous Flux     | 100-110LM/W          | 100-110LM/W  | 100-110LM/W  |
| Color Temperature | 3000 - 6500K         | 3000 - 6500K | 3000 - 6500K |
| CRI               | >80                  | >80          | >80          |
| Power Factor      | >0.95                | >0.95        | >0.95        |
| Working Temp      | -30 ~ +50°C          | -30 ~ +50°C  | -30 ~ +50°C  |
| Protection        | IP65                 | IP65         | IP65         |
| Life Span         | 50000Hrs             |              |              |