



BR-ZSL180



BR-ZCL180

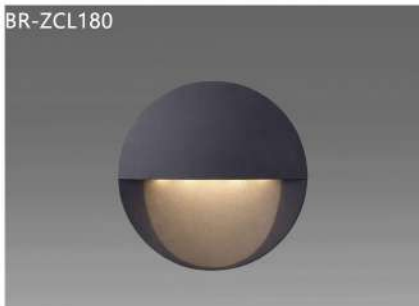

IP66 version available on request

DESCRIPTION:

Recessed mounted asymmetrical indirect Ramp lights
Body made of die-cast aluminium with Polyester powder coating applied after a phosphochromate treatment.
Diffuser made of tempered glass, resistant to impact and Thermal shock.

PC Recessed mounting box for easy installation.


High corrosion resistance capability.

Stainless steel alloy screws.

Power supply 240V/50Hz

- Heat resistant wiring
- Ideal for external ramp lighting
- European standard of EN 60598

PHOTOMETRIC DATA

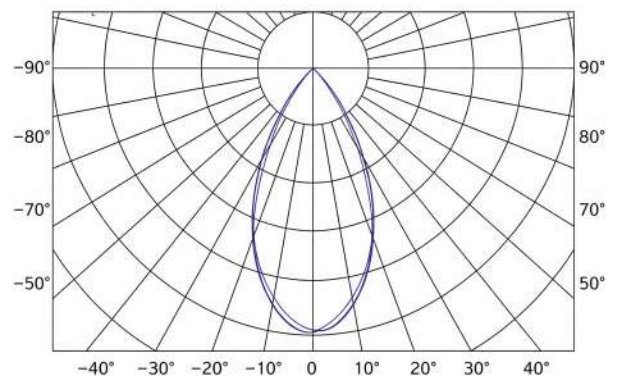

Model No.	BR-ZSL180 / BR-ZCL180		
Rated Power	3W LED	5W LED	10W LED
LED Type	SMD (CREE)	SMD (CREE)	SMD (CREE)
Product Size	180x180mm	180x180mm	180x180mm
Input Voltage	AC220-240V	AC220-240V	AC220-240V
Frequency Range	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz
Power Factor	>0.95	>0.95	>0.95
Color Temperature	2700K-6500K	2700K-6500K	2700K-6500K
Color Rendering Index	>80	>80	>80
Mini Luminous Flux	80LM/W	80LM/W	80LM/W
Temp. in Working	20 C +50 C	20 C +50 C	20 C +50 C
Protection Grade	IP65	IP65	IP65
Life Span	50000Hrs		