



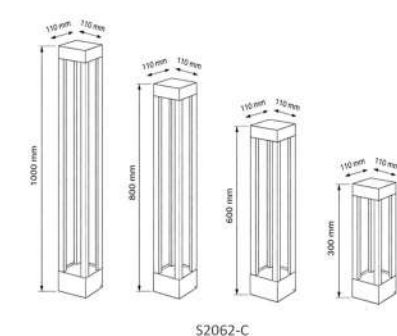

Model No:	S2062-B / S2062-C			
Power	5W LED	10W LED	12W LED	15W LED
LED Type	COB	COB	COB	COB
Voltage	AC100-265V / 50-60Hz			
Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W
Color Temperature	3000 - 6500K	3000 - 6500K	3000 - 6500K	3000 - 6500K
CRI	>90	>90	>90	>90
Power Factor	>0.95	>0.95	>0.95	>0.95
Working Temp	-20°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C
Protection	IP65	IP65	IP65	IP65
Life Span	50000Hrs			

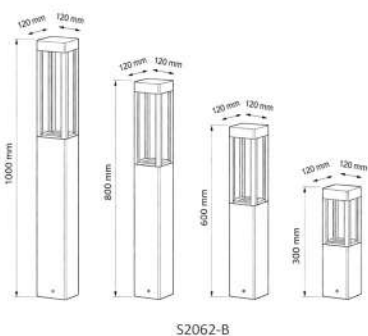

DESCRIPTION:

External garden or walkway bollard luminaire,
Body made of Aluminium Alloy with polyester powder Coated finish.
Epoxy cationic electro-coating, upon phospho-chromate treatment, Uv-stabilising primer
Diffuser made of tempered glass, thermal shock and Impact resistant.
High corrosion resistant capability
Silicon rubber gasket for dust & water proof
Stainless steel alloy screws.
High quality LED chip by Osram
Power supply: AC100-265V/50Hz
-Heat resistant and solid conduct wiring
-Ideal for external garden and area lighting
-European standard of EN 60598

Available:



Photometric Data

