



BR-DX008-1





BR-DX008-2



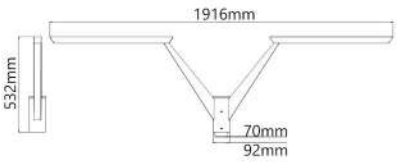

Color Options

Black RAL 9011 | Dark Grey RAL 7043 | White RAL 9003 | Matt Silver RAL 9006

DURABLE CONSTRUCTION
Die-cast aluminum body, corrosion resistant.

HIGH EFFICIENCY
Up to 150 lm/W energy saving and reliable.

IP66 WATERPROOF
Perfect for outdoor environments.

ELEGANT DESIGN
Timeless European style blends with any architecture.

IP66


DESCRIPTION

Modern architectural pole mounted luminaire.
Body made of die-cast aluminium with electro static Powder coated painting in black, grey or silver Finish.
Epoxy cationic electro-coating, upon phospho-Chromate treatment, Uv-stabilising primer.
Diffuser made of tempered clear glass.
High corrosion resistant capability
Silicon rubber gasket for dust & waterproof
Stainless steel alloy screws
- Heat resistant and solid conduct wiring
- Ideal for external garden and area lighting
- European standard of EN 60598

POLE:

Column made of Hot Deep Galvanized steel with epoxy cationic eletro-coating, upon phospho-chromate treatment, Uv-stabilising primer.
Aluminium Alloy, and Extruded aluminium pole available on request.

Symmetric



Asymmetric



The symmetric light distribution is ideal for illuminating squares, plazas and othe open areas while the asymmetric light distribution is ideal for illuminating streets and pathways


BROADWAY - UK Ltd.

BROADWAY -UK Ltd., Aldridge, West Midlands, United Kingdom. info@broadwaylux.co.uk,
www.broadwaylux.co.uk


Product Code	BR-DX008-1	BR-DX008-1	BR-DX008-1	BR-DX008-1	BR-DX008-2	BR-DX008-2	BR-DX008-2
Rated Power	20W	30W	50W	60W	2x30W	2x50W	2x60W
LED Type	PHILIPS	PHILIPS	PHILIPS	PHILIPS	PHILIPS	PHILIPS	PHILIPS
Input Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Frequency Range	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
CRI	>80	>80	>80	>80	>80	>80	>80
Color Temperature	3000K - 6500K	3000K - 6500K	3000K - 6500K	3000K - 6500K	3000K - 6500K	3000K - 6500K	3000K - 6500K
Efficiency	>90%	>90%	>90%	>90%	>90%	>90%	>90%
Luminous Flux	150LM/W	150LM/W	150LM/W	150LM/W	150LM/W	150LM/W	150LM/W
Temperature in Working	-30°C +55°C	-30°C +55°C	-30°C +55°C	-30°C +55°C	-30°C +55°C	-30°C +55°C	-30°C +55°C
THD	<9%	<9%	<9%	<9%	<9%	<9%	<9%
Beam Angle	90°/120°	90°/120°	90°/120°	90°/120°	90°/120°	90°/120°	90°/120°
Dimmable	PWM / DALI Dimming 0/1-10V Dimming (On request)						
Surge Protection	6KV	6KV	6KV	6KV	6KV	6KV	6KV
Protection Grade	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08	IP66, IK08
Life Span				50000Hrs	V	V	V


Photometric Data

BR-DX008-1

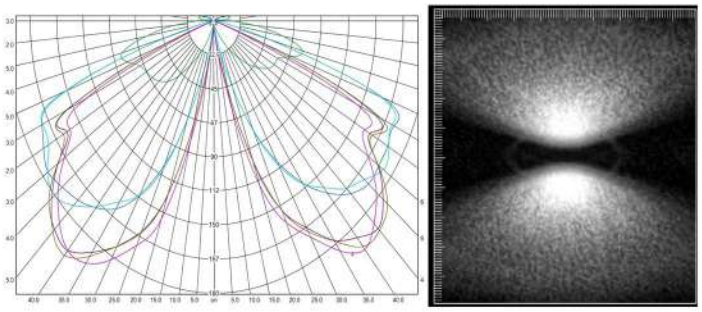

BR-DX008-2

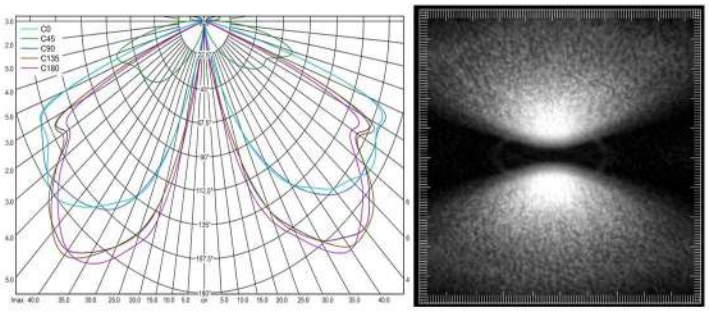

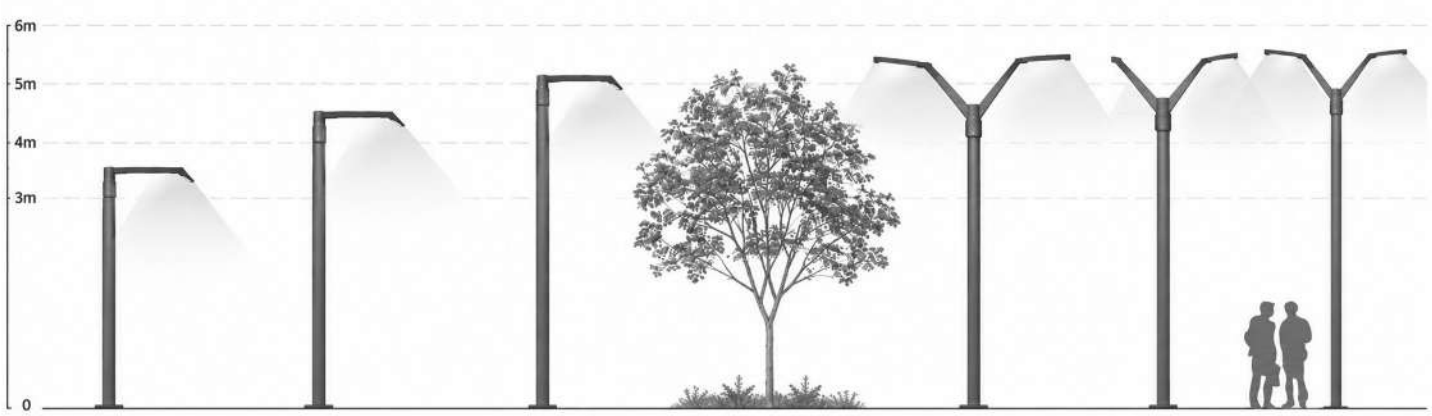

BROADWAY - UK Ltd.